

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD

K

REV / 0720-0977-96

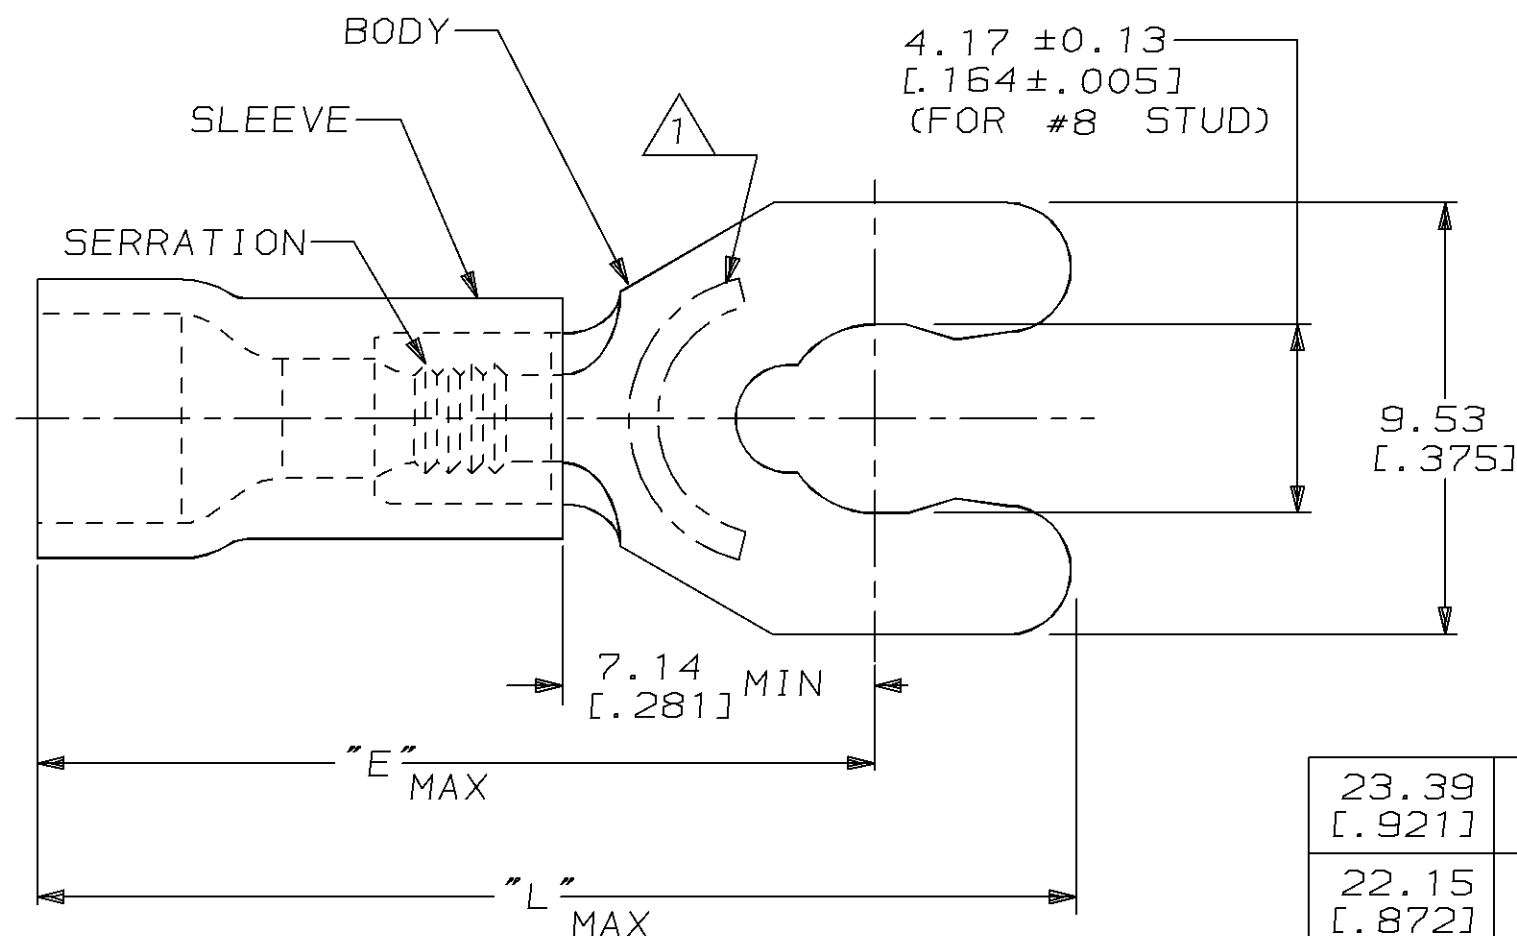
13JUN96

ME

BB

AMP
WIRE RANGE

E13288

LR7189
Certified16-14 AWG
SOLID OR STRANDED16-14 AWG
SOLID OR STRANDED16-14 AWG
SOLID OR STRANDED

1 STAMP 8SAMP 16-14* APPROX AS SHOWN

2. SEE TABLE FOR WIRE INSUL DIA

3. TONGUE MATL THK, 0.79±0.05 [0.031±0.002]

23.39 [.921]	18.95 [.746]	3.81-6.35 [.150-.250]	100	LOOSE PIECE, BOX	9-52956-1
22.15 [.872]	17.70 [.697]	2.92-4.32 [.115-.170]	100	LOOSE PIECE, BOX	7-52956-1
23.39 [.921]	18.95 [.746]	3.81-6.35 [.150-.250]	2500	ON TAPE, REEL	52956-3
23.39 [.921]	18.95 [.746]	3.81-6.35 [.150-.250]	1000	LOOSE PIECE	52956-2
22.15 [.872]	17.70 [.697]	2.92-4.32 [.115-.170]	5000	ON TAPE, REEL	52956-1
22.15 [.872]	17.70 [.697]	2.92-4.32 [.115-.170]	1000	LOOSE PIECE	52956
L	E	WIRE INSUL DIA	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
90°C [194°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DWN
L OLMEDA

26JUN95

CHK
M ELLIS

26JUN95

APVD
G NGO

26JUN95

PRODUCT SPEC

UL 486A

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

AMP

AMP Incorporated
Harrisburg, PA 17105-3608NAME
TERMINAL, SPRING SPADE,
SHORT, PLASTI-GRIP,
WIRE SIZE, 16-14 AWGSIZE
A3

CAGE CODE

00779


DRAWING NO

C-52956

SCALE
6:1SHEET
1 OF 1REV
KFOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

VOLTAGE RATING:
600V MAX
(1000V FIXTURE OR SIGN)CIRCULAR MIL AREA:
1.04mm²-2.62mm²
[2,050-5,180]DIMENSIONS:
mm [in]TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [0.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-MATERIAL
BODY, BRASS PER ASTM B-36
SLEEVE, PVC, COLOR, BLUEFINISH
TIN PLATE
PER MIL-T-10727

AMP 1470-19 REV 09MAY94