

Surge Arrester

A71-H14XF

2-Electrode-Arrester

Ordering code: B88069X2170C102


DC spark-over voltage ^{1) 2)}	980 ... 1680	V
Service life 1 operations 50 Hz; 1 s ³⁾	50	A
Insulation resistance at 100 V _{dc}	> 10	GΩ
Capacitance at 1 MHz	< 1	pF
Arc voltage at 1 A	~ 20	V
Glow to arc transition current	~ 0.5	A
Glow voltage	~ 160	V
Weight	~ 1	g
Operation and storage temperature	-40 ... +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, green	EPCOS 1400 YY O 1400 - Nominal voltage YY - Year of production O - Non radioactive	

¹⁾ At delivery AQL 0.65 level II, DIN ISO 2859

²⁾ In ionized mode

³⁾ Internal short circuit ≤ 1 s

Terms in accordance with ITU-T Rec. K12 and DIN 57845/VDE0845

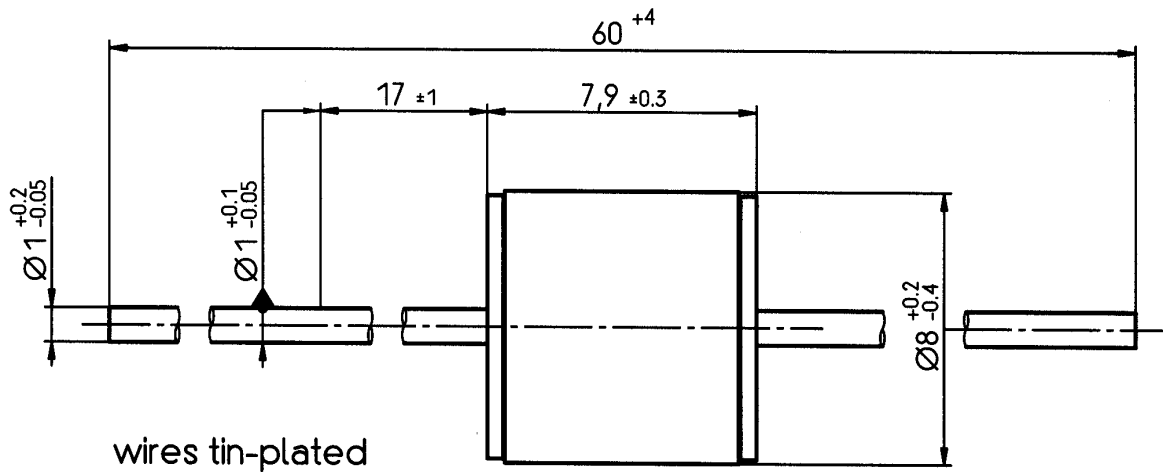

Not to scale

Dimensions in mm

Non controlled document



中发网 WWW.ZFA.CN

全球最大的PDF中文下载站



中发网
www.zfa.cn

PDF 资料下载尽在中发网