

SHINDENGEN


Sidac

K1V14

OUTLINE DIMENSIONS

Case : AX10

(Unit : mm)

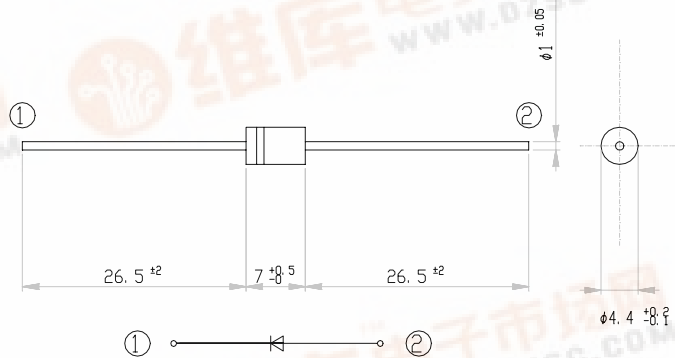

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~125	°C
Operating Junction Temperature	T _j		125	°C
Maximum Off-state Voltage	V _{DRM}		115	V
RMS On-state Current	I _T	T _j = 109°C, 50Hz sine wave (θ = 180°)	1	A
Surge On-state Current	I _{TSM}	T _j = 25°C, 50Hz sine wave (θ = 180°), non-repetitive 1-cycle peak value	20	A
Pulse On-state Current	I _{TRM}	T _a = 25°C, pulse width t _o = 10 μs, sine wave, repetitive peak value f = 1 kHz	25	A
		T _a = 25°C, pulse width t _o = 10 μs, sine wave, repetitive peak value f = 60 Hz	80	
Critical Rate of Rise of On-state Current	di _T /dt		80	A/μs

● Electrical Characteristics (T_j=25°C)

Item	Symbol	Conditions	Ratings	Unit
Breakover Voltage	V _{BO}	I _B = 0, 50Hz sine wave	125~150	V
Off-state Current	I _{DRM}	V _D = V _{DRM}	Max 10	μA
Breakover Current	I _{BO}		Max 0.5	mA
Holding Current	I _H		TYP 30	mA
On-state Voltage	V _T	I _T = 1A	Max 1.5	V
Switching Resistance	R _S		Min 0.1	kΩ
Thermal Resistance	θ _{jl}	Junction to lead	Max 15	°C/W

● Standard Design with P.C.B.


Item	Symbol	Conditions	Standard	Unit
RMS On-state Current	I _T	Assembled in P.C.B., T _a = 25°C, soldering land 3mm φ	1.04	A



K1V14

K1V16


Typical On-State Voltage

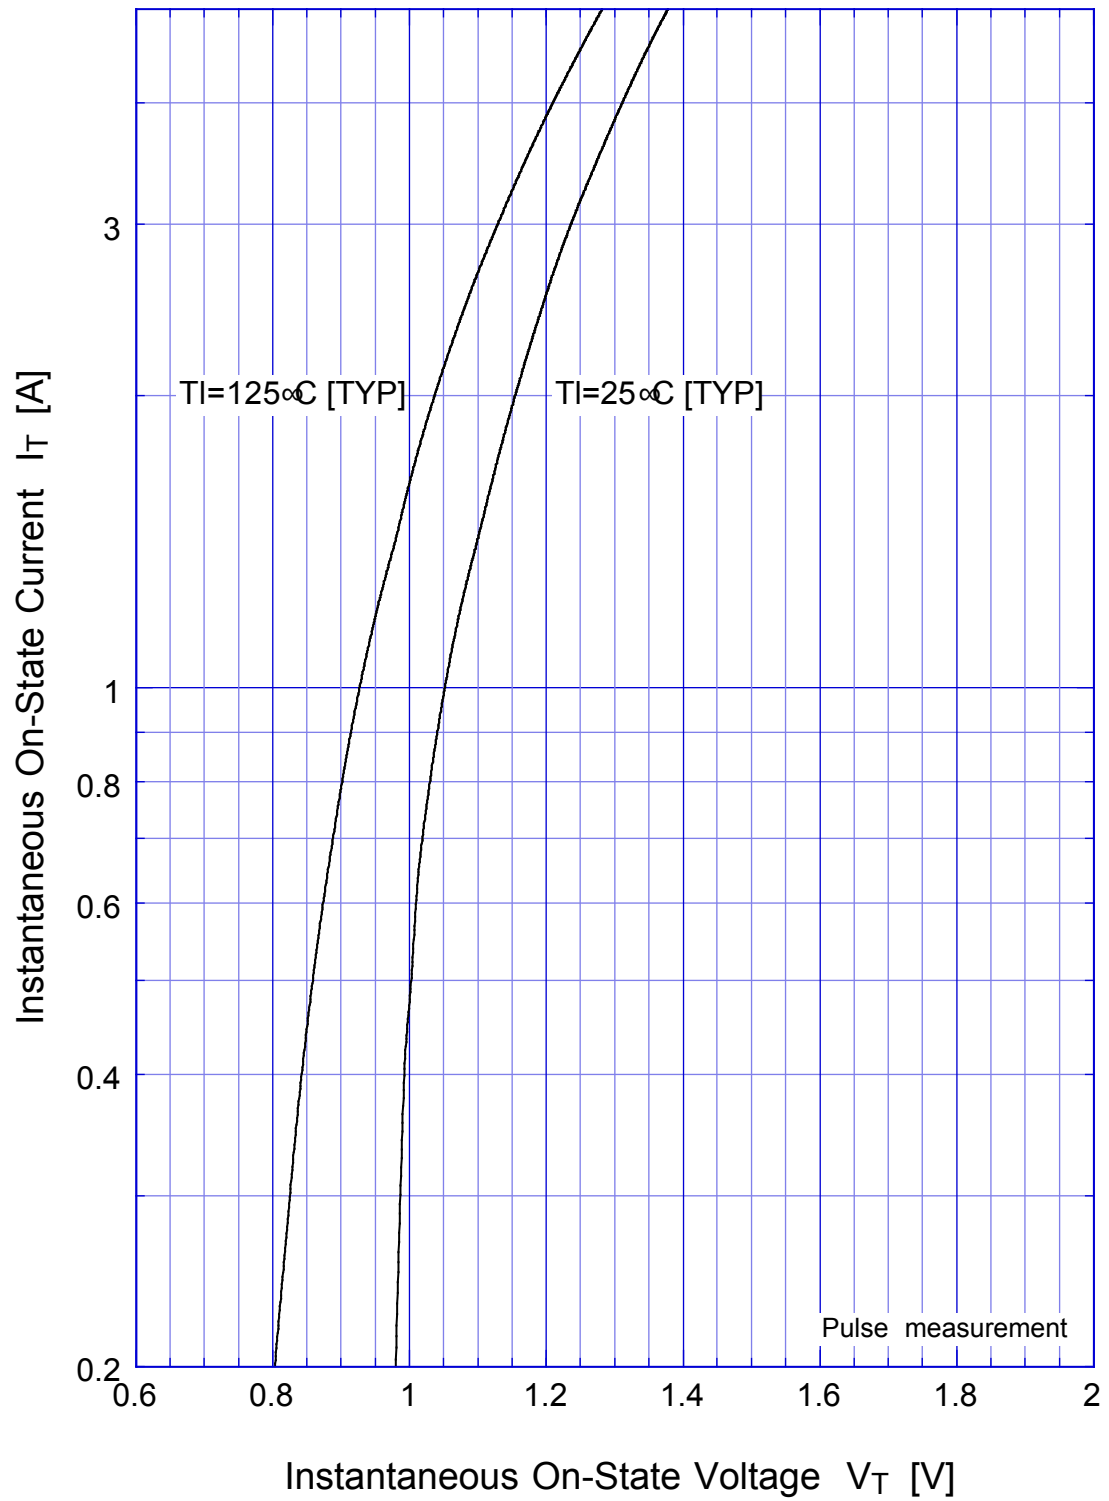

K1V14

K1V16


Power Dissipation

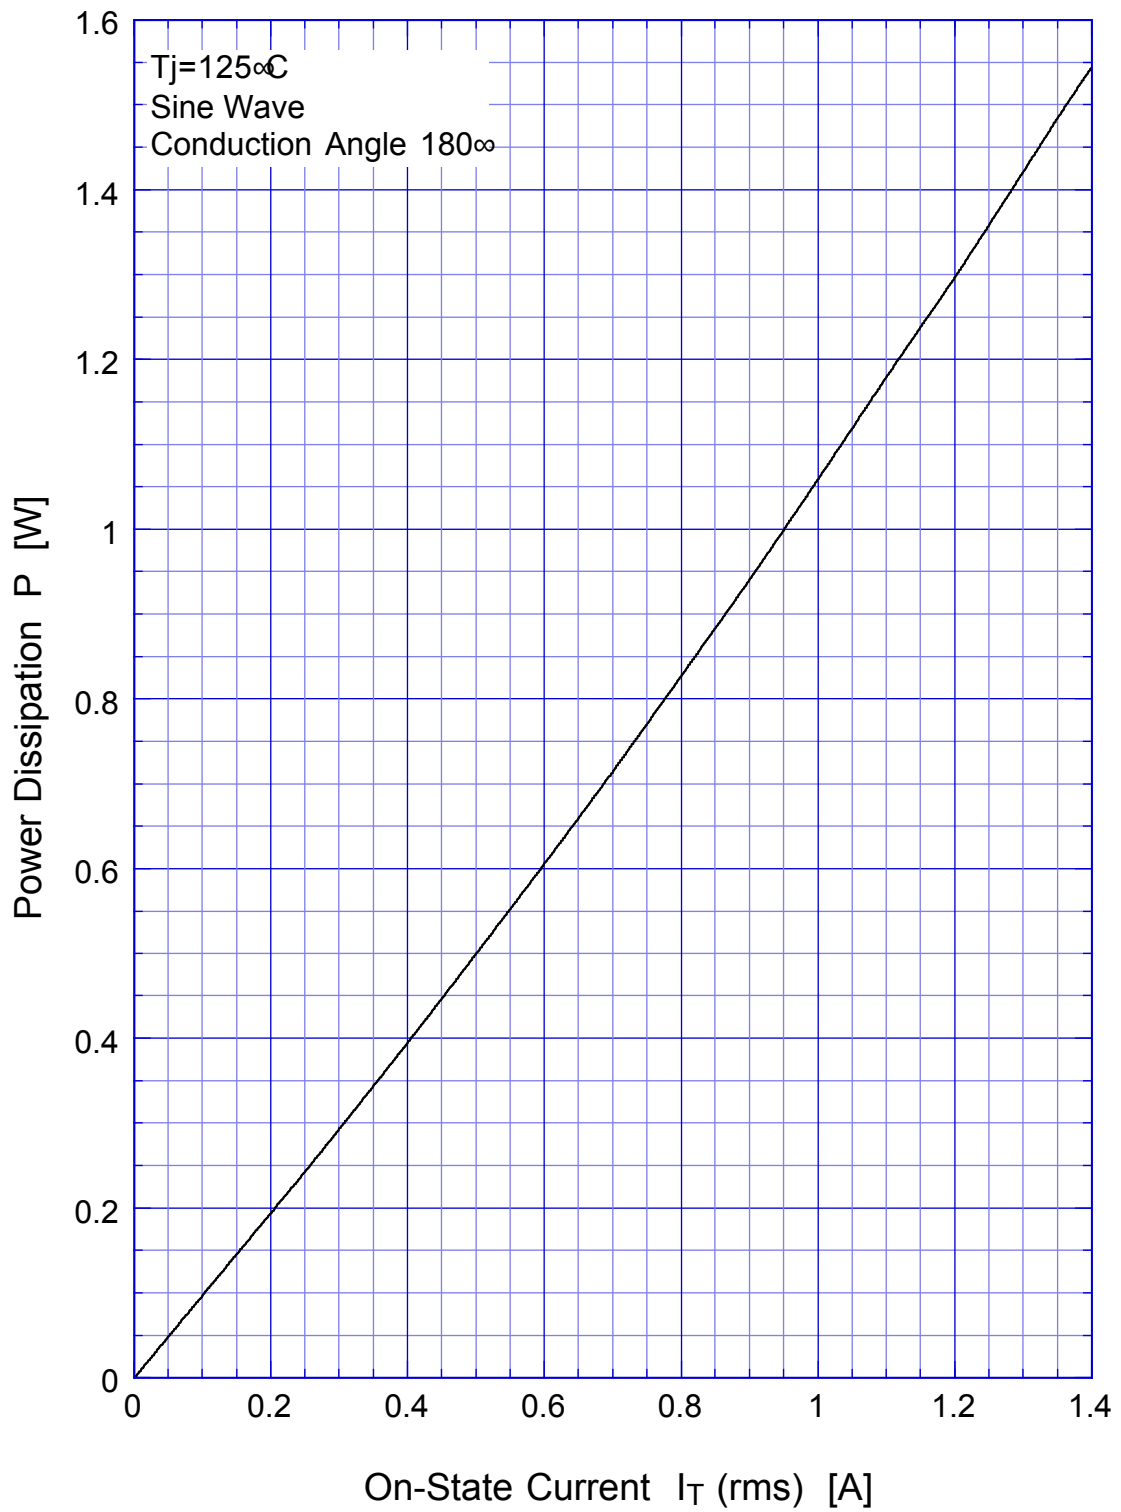

K1V14

K1V16


Maximum Lead Temperature

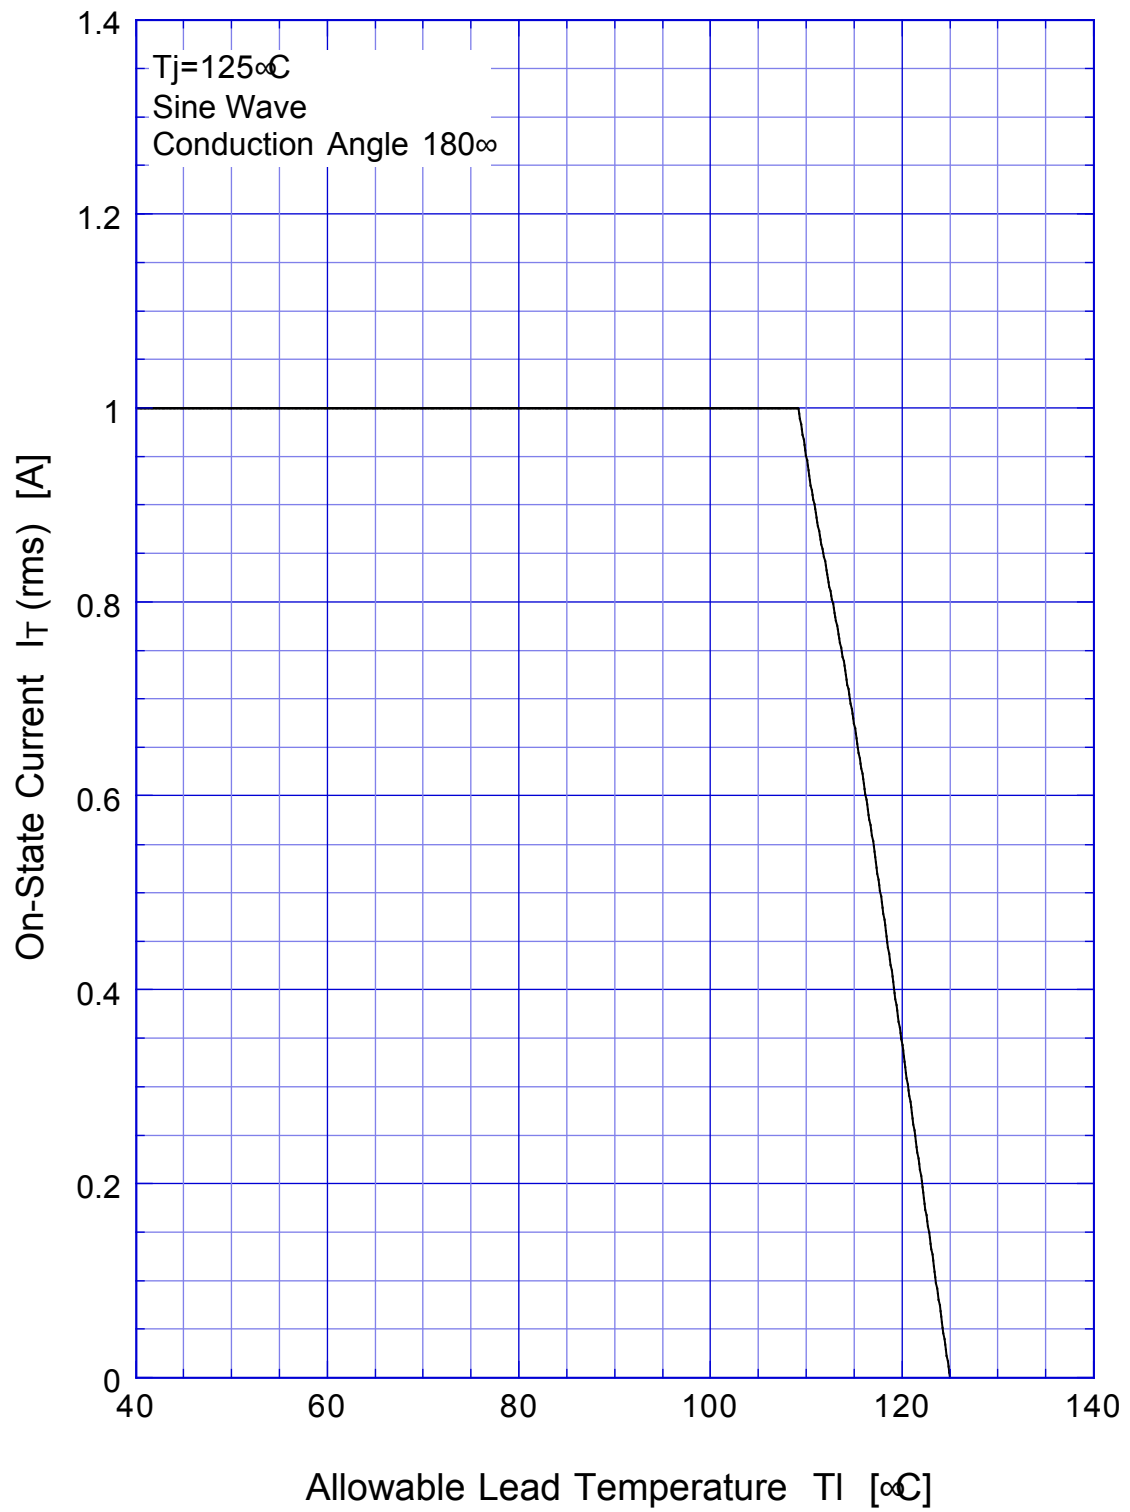

K1V14

K1V16


Maximum Ambient Temperature

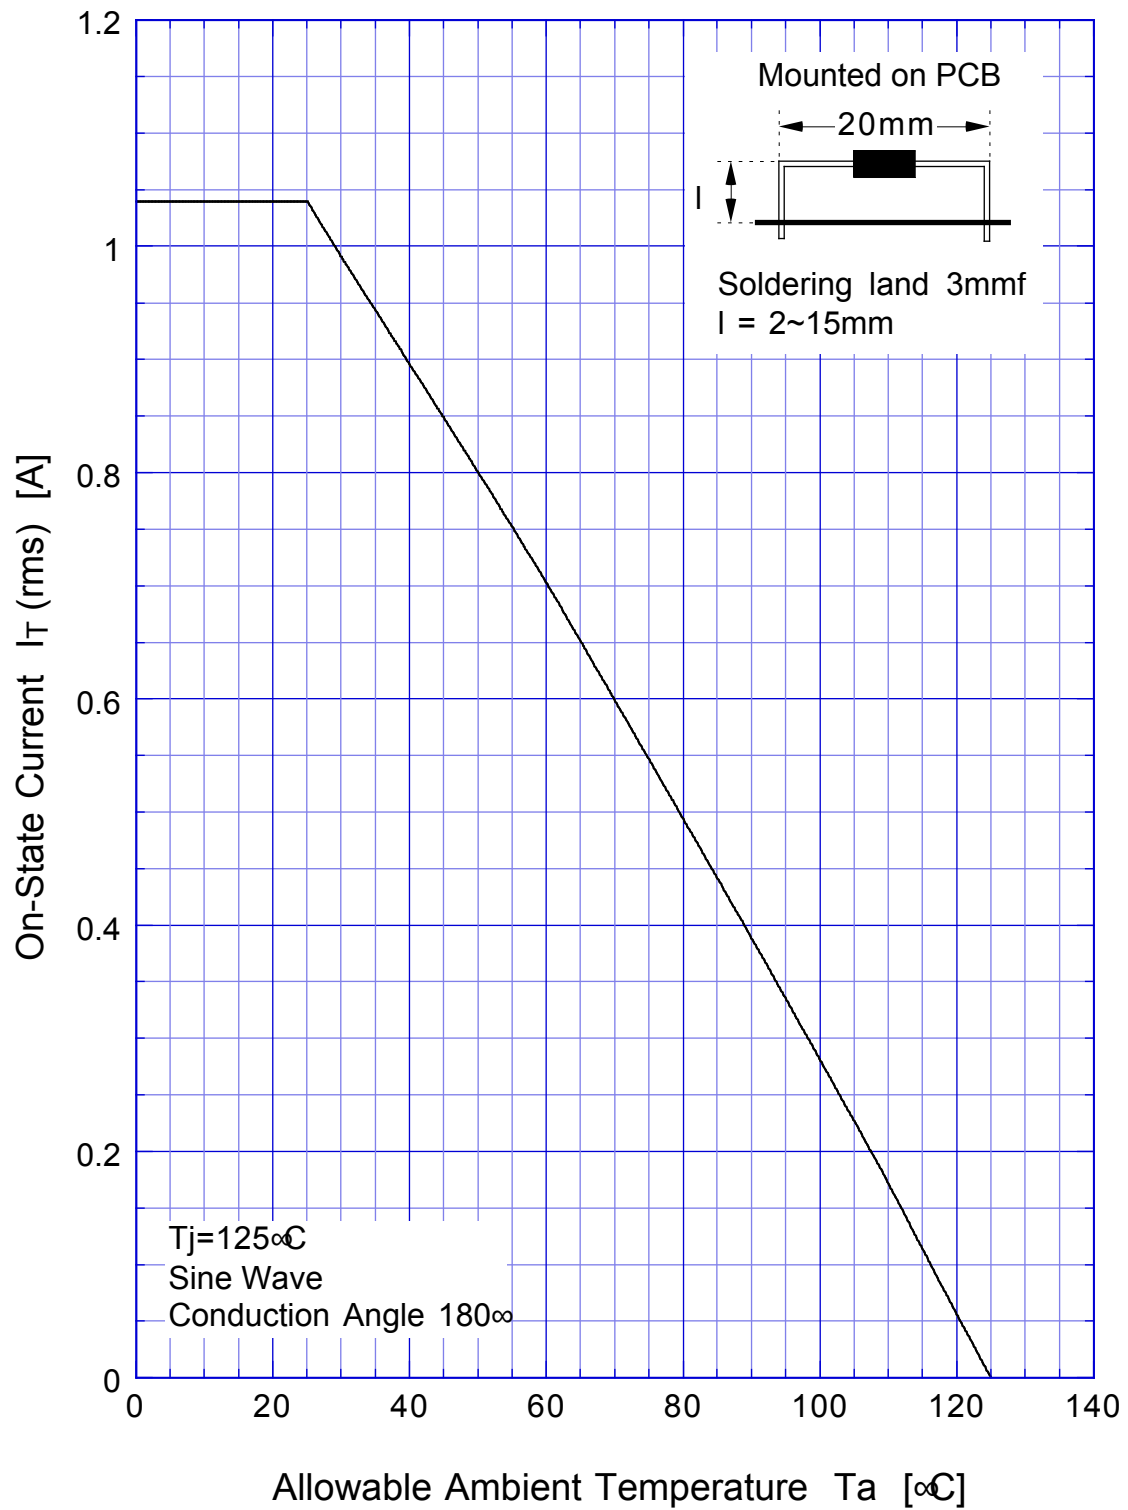

K1V14


K1V16

Maximum Surge On-State Current

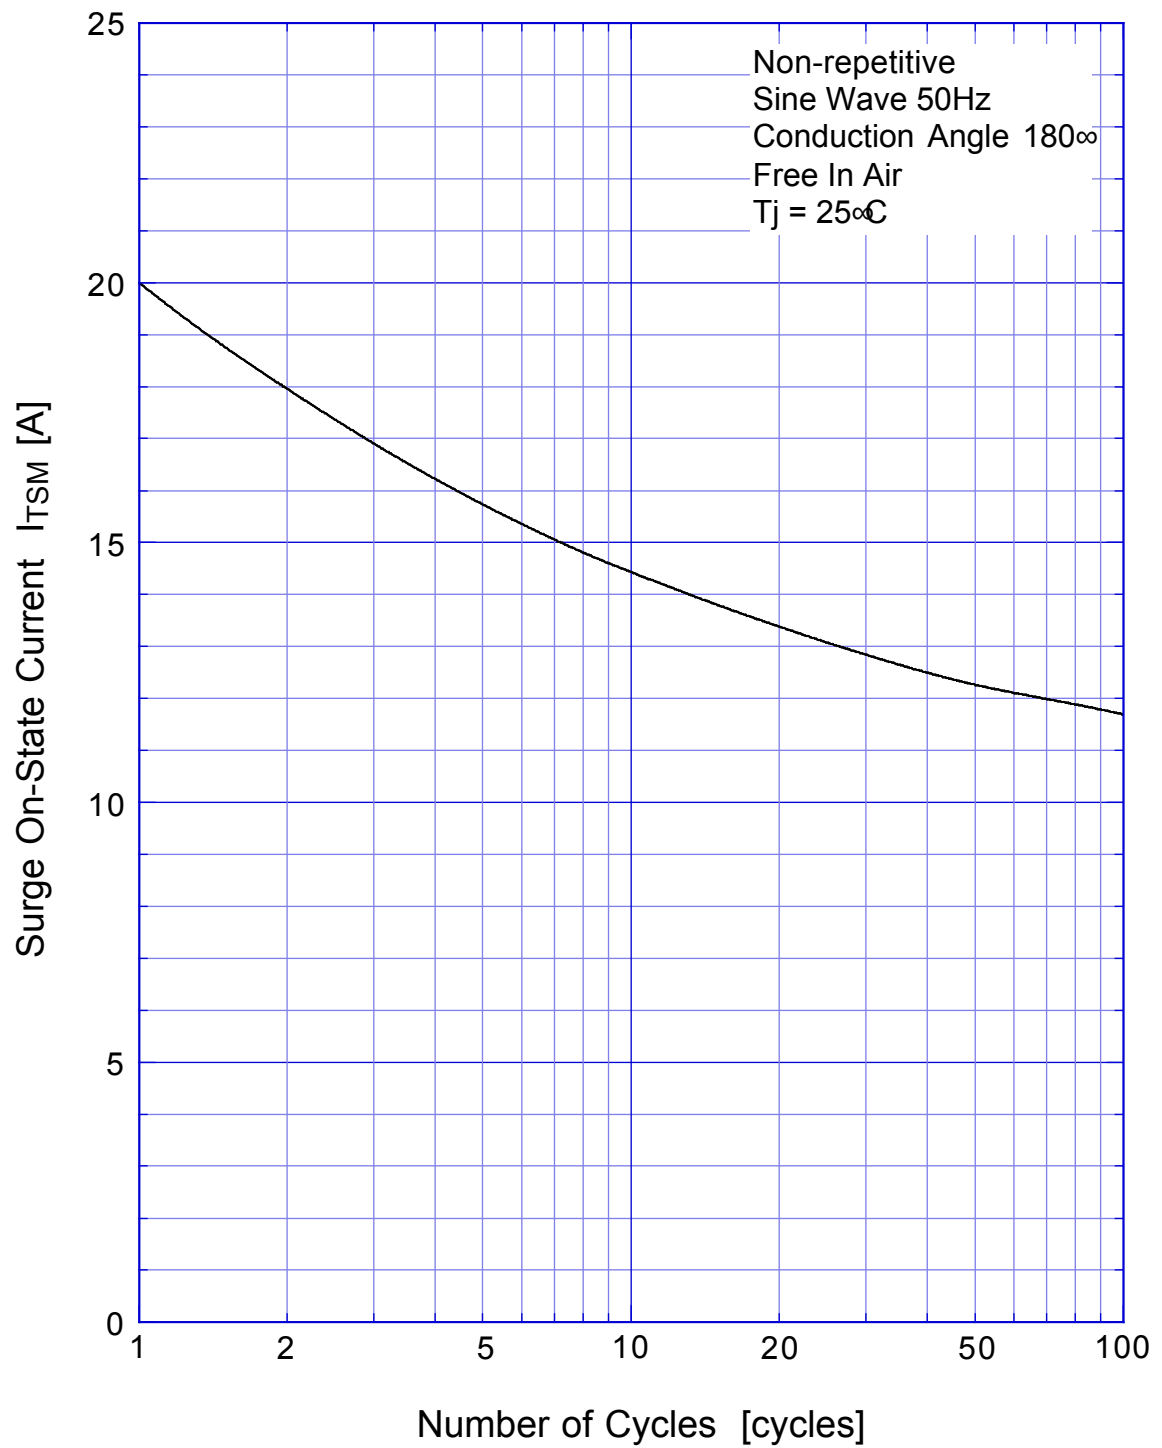

K1V14
K1V16


Pulse On-State Current Rating

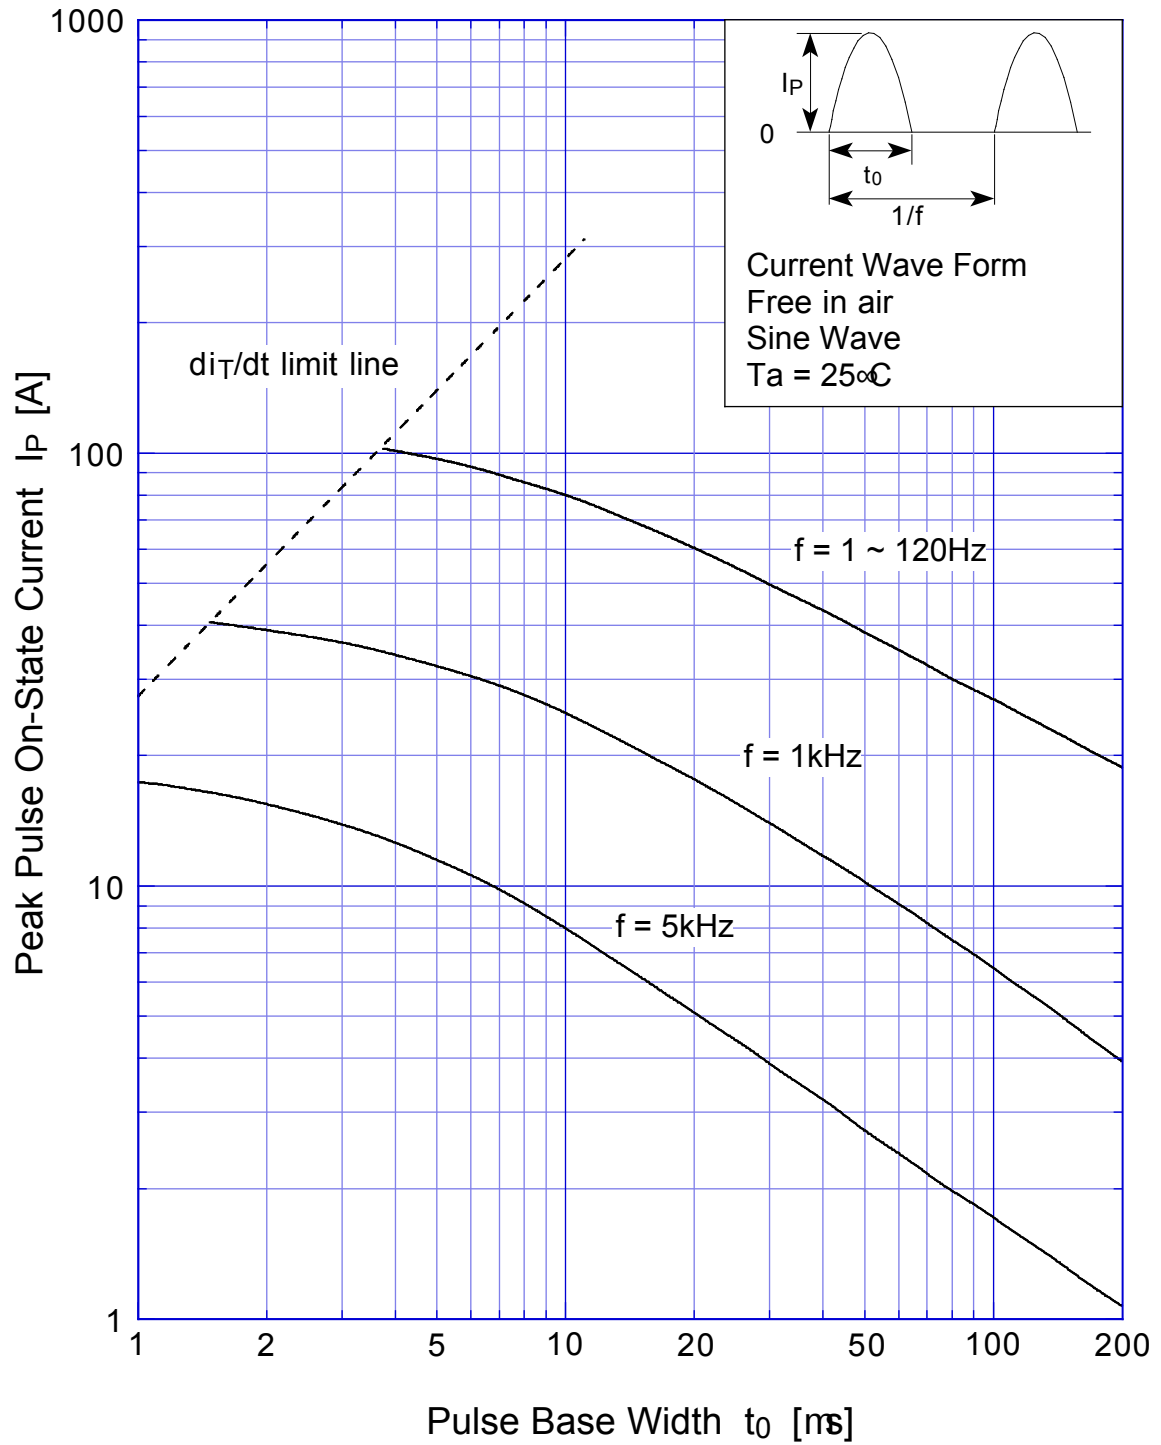

K1V14

K1V16


Pulse On-State Current Derating

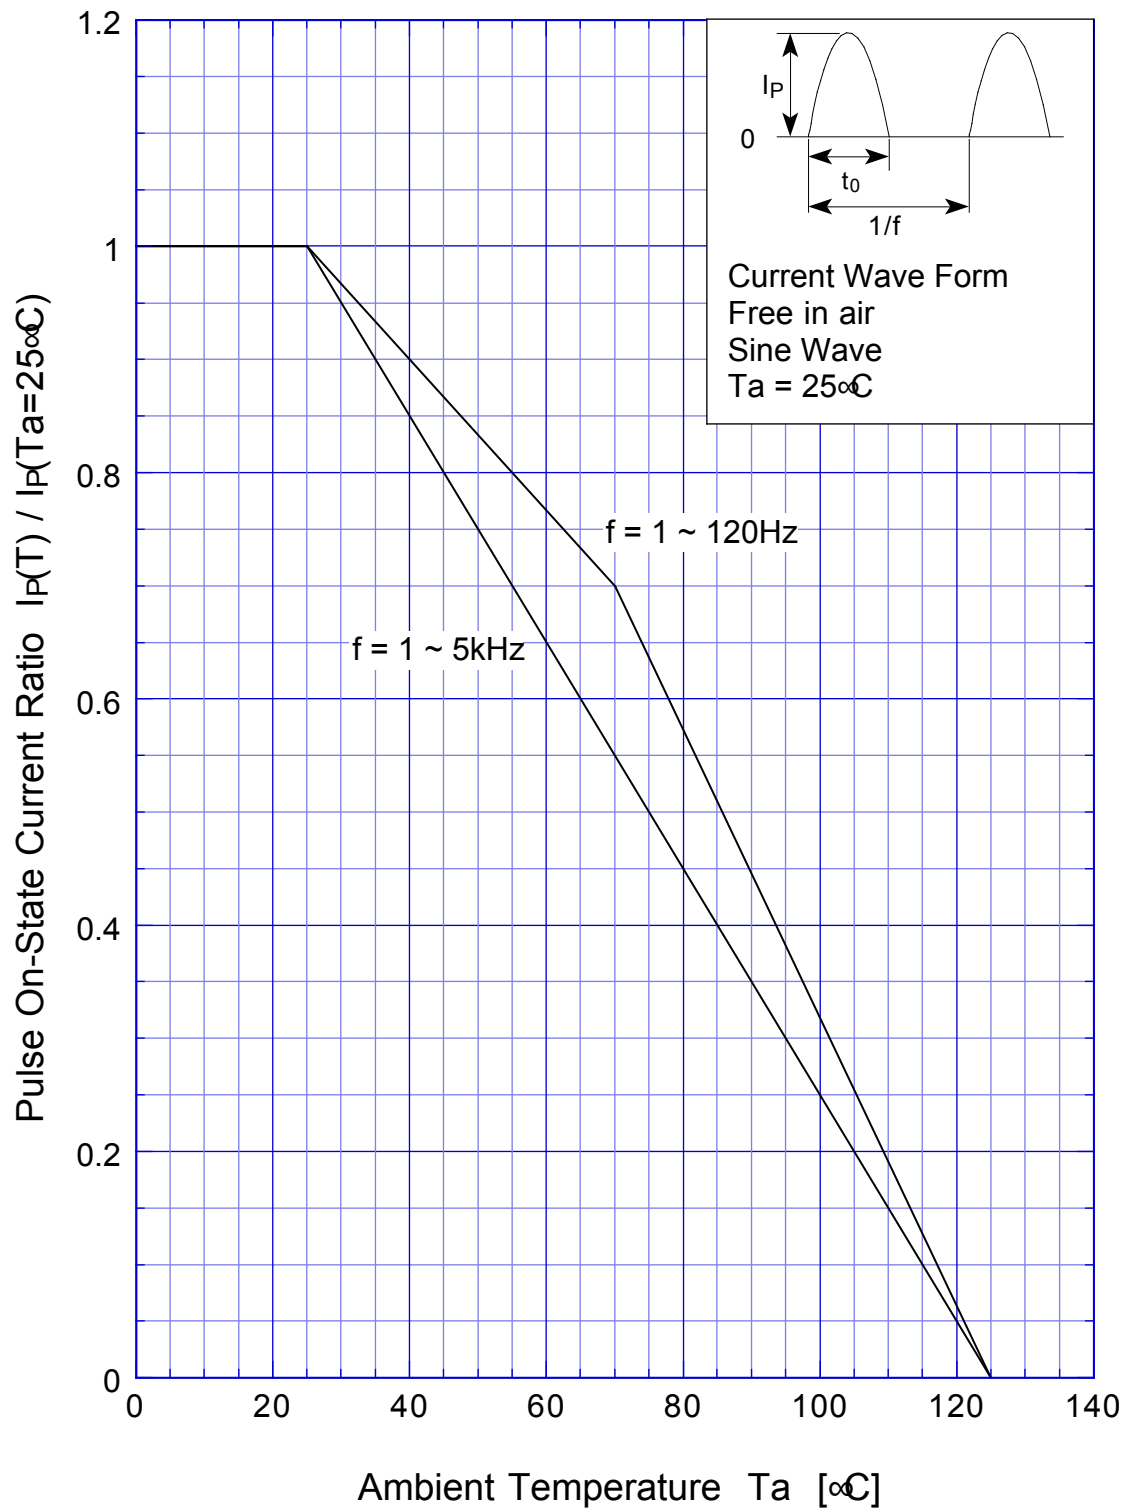

K1V14

K1V16

Transient Thermal Resistance

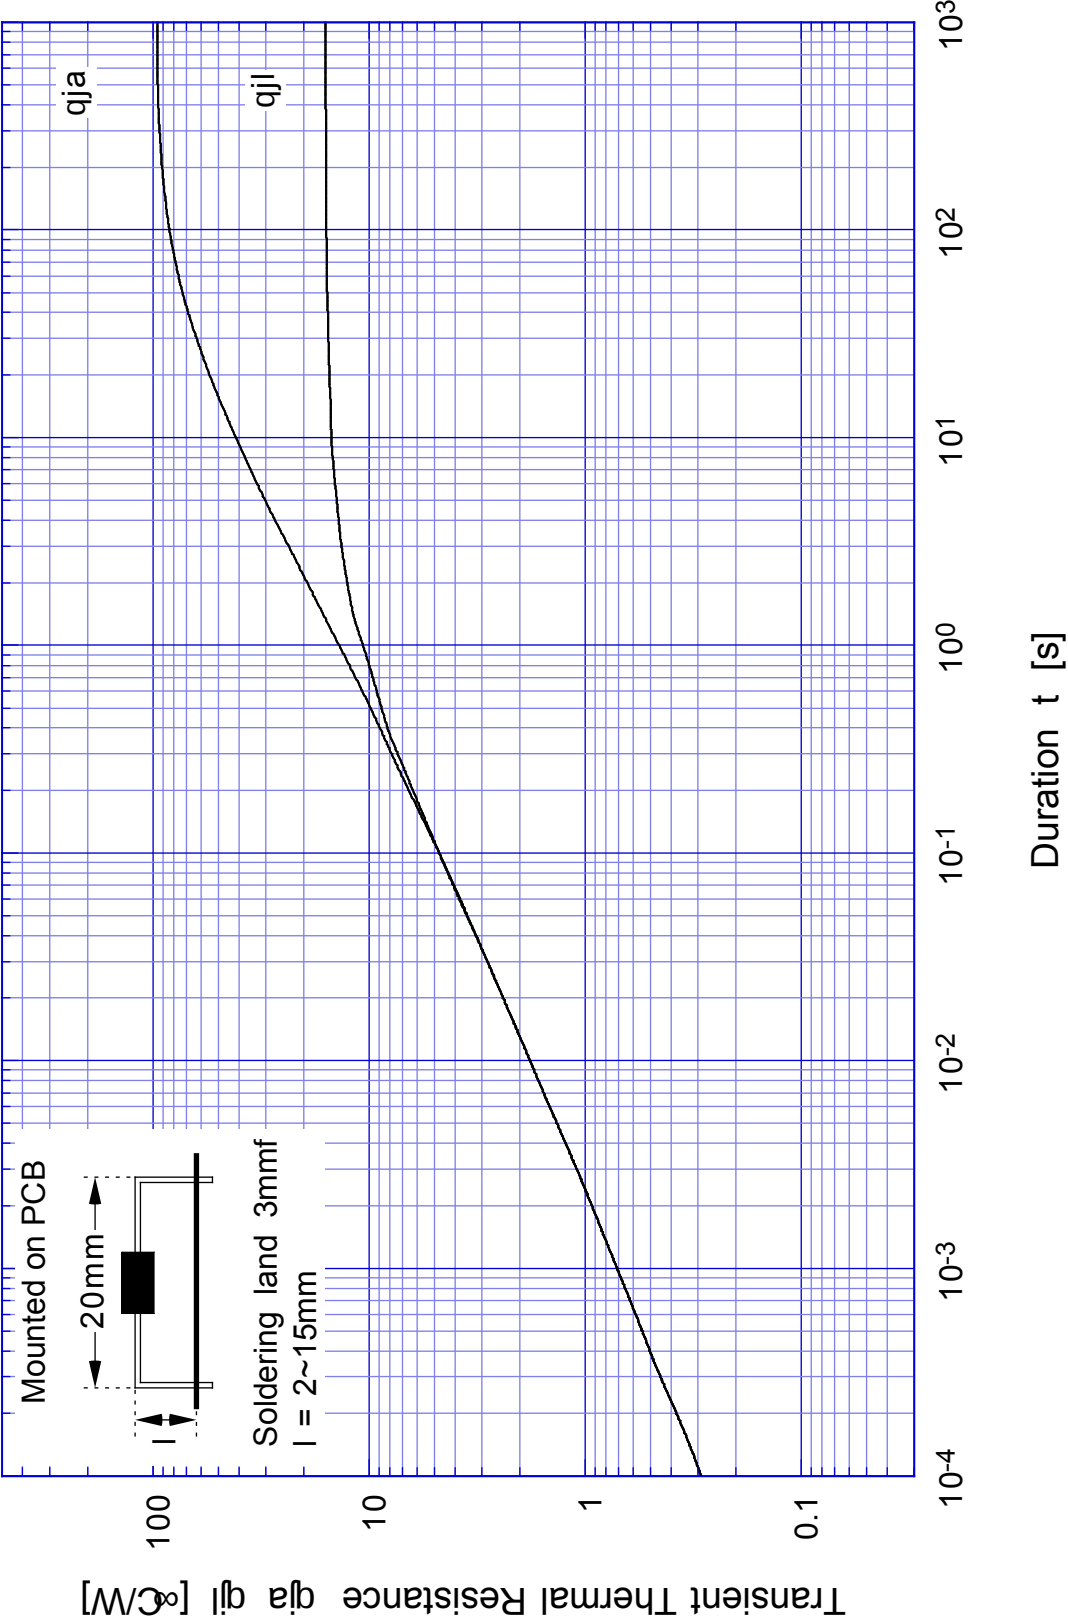

K1V14

K1V16

Breakover Voltage - Junction Temperature

