



Si3483DV
Vishay Siliconix

P-Channel 30-V (D-S) MOSFET



PRODUCT SUMMARY		
V _{DS} (V)	r _{DS(on)} (Ω)	I _D (A)
-30	0.035 @ V _{GS} = -10 V	-6.2
	0.053 @ V _{GS} = -4.5 V	-5.0

FEATURES

- TrenchFET® Power MOSFET

APPLICATIONS

- Load Switch

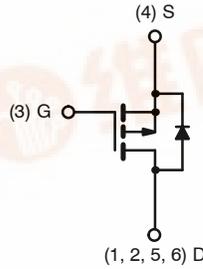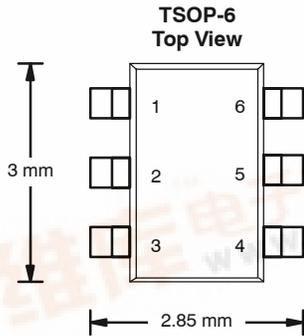

P-Channel MOSFET

Ordering Information: Si3483DV-T1—E3 (Lead Free)

ABSOLUTE MAXIMUM RATINGS (T _A = 25°C UNLESS OTHERWISE NOTED)					
Parameter	Symbol	5 secs	Steady State	Unit	
Drain-Source Voltage	V _{DS}	-30		V	
Gate-Source Voltage	V _{GS}	±20			
Continuous Drain Current (T _J = 150°C) ^a	I _D	T _A = 25°C	-6.2	-4.7	A
		T _A = 70°C	-4.9	-3.7	
Pulsed Drain Current	I _{DM}	-25		A	
Continuous Source Current (Diode Conduction) ^a	I _S	-1.7	-0.95		
Maximum Power Dissipation ^a	P _D	T _A = 25°C	2.0	1.14	W
		T _A = 70°C	1.3	0.73	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150		°C	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient ^a	R _{thJA}	t ≤ 5 sec	45	62.5	°C/W
		Steady State	90	110	
Maximum Junction-to-Foot (Drain)	R _{thJF}	25	30		

^a Surface Mounted on 1" x 1" FR4 Board.





SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-1.0		-3	V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -30 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -30 V, V _{GS} = 0 V, T _J = 85 °C			-5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≤ -5 V, V _{GS} = -10 V	-25			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -10 V, I _D = -6.2 A		0.028	0.035	Ω
		V _{GS} = -4.5 V, I _D = -5.0 A		0.042	0.053	
Forward Transconductance ^a	g _{fs}	V _{DS} = -15 V, I _D = -6.2 A		14		S
Diode Forward Voltage ^a	V _{SD}	I _S = -1.7 A, V _{GS} = 0 V		-0.8	-1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = -15 V, V _{GS} = -10 V, I _D = -6.2 A		23	35	nC
Gate-Source Charge	Q _{gs}			3.6		
Gate-Drain Charge	Q _{gd}			6		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -15 V, R _L = 15 Ω I _D ≅ -1 A, V _{GEN} = -10 V, R _g = 6 Ω		10	15	ns
Rise Time	t _r			10	15	
Turn-Off Delay Time	t _{d(off)}			71	110	
Fall Time	t _f			45	70	
Source-Drain Reverse Recovery Time	t _{rr}		I _F = -1.7 A, di/dt = 100 A/μs		45	

Notes







- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

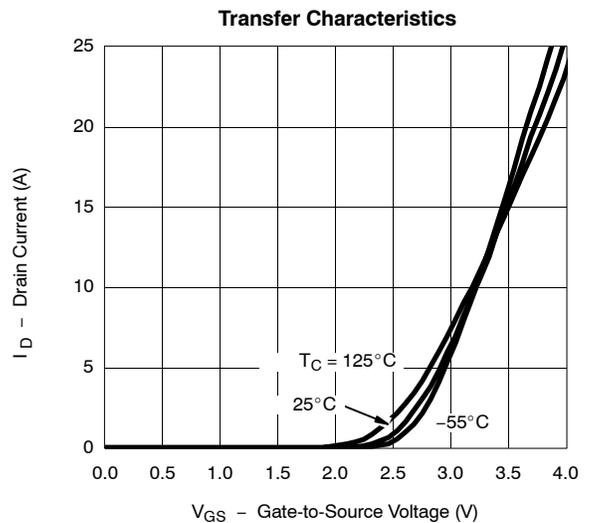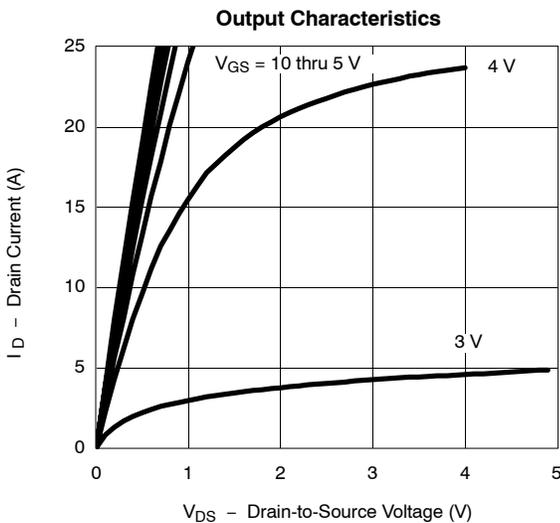







TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

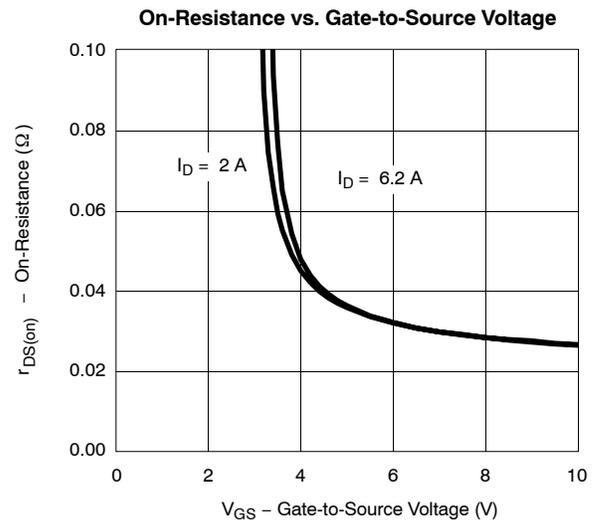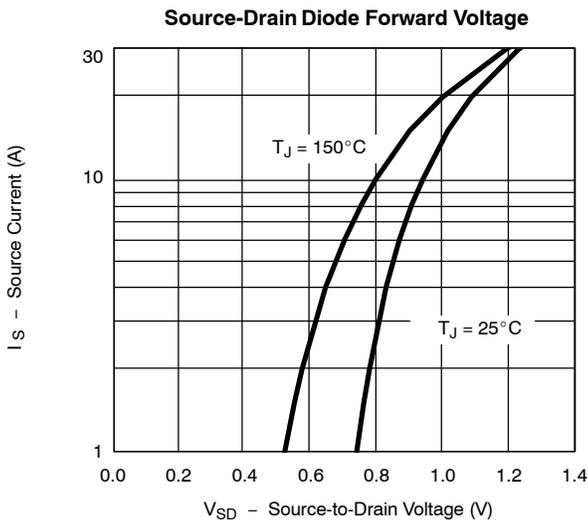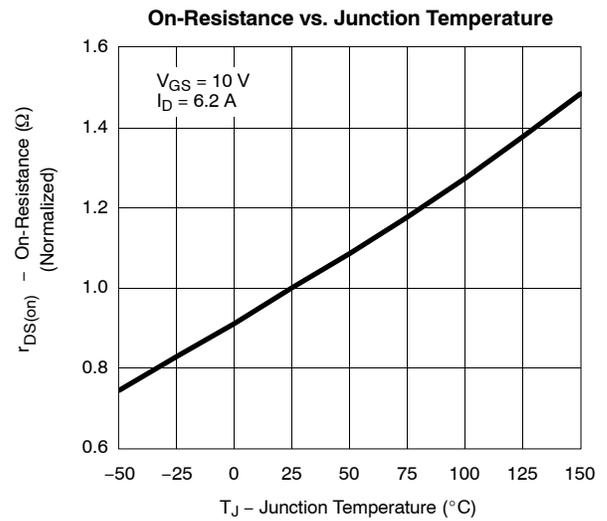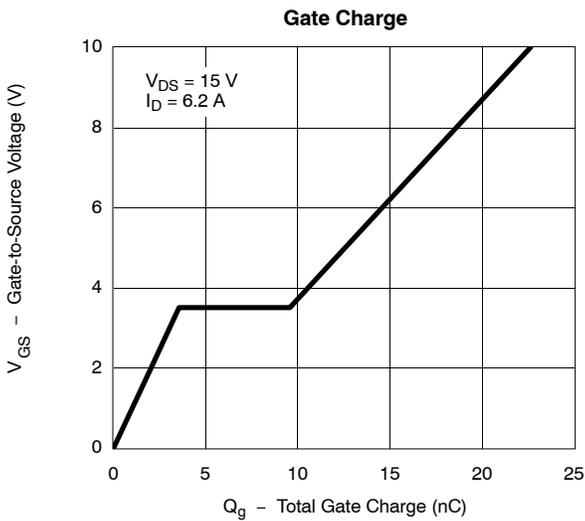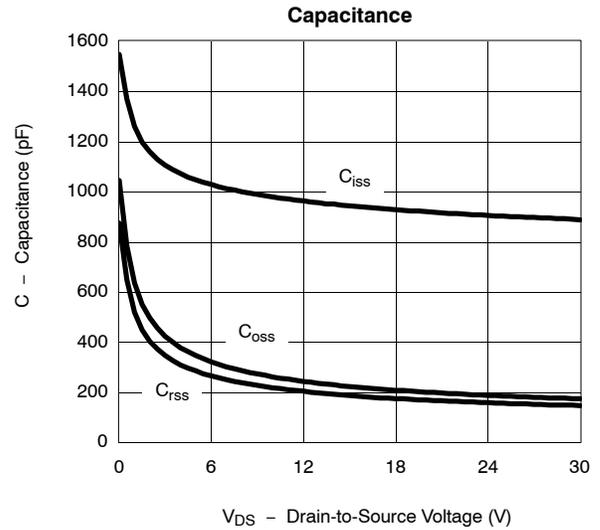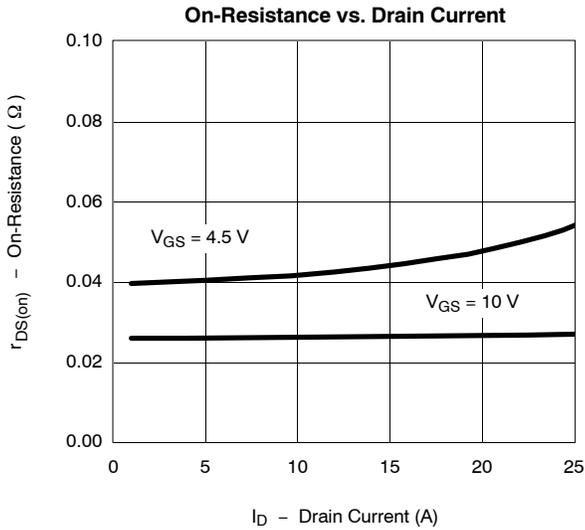



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

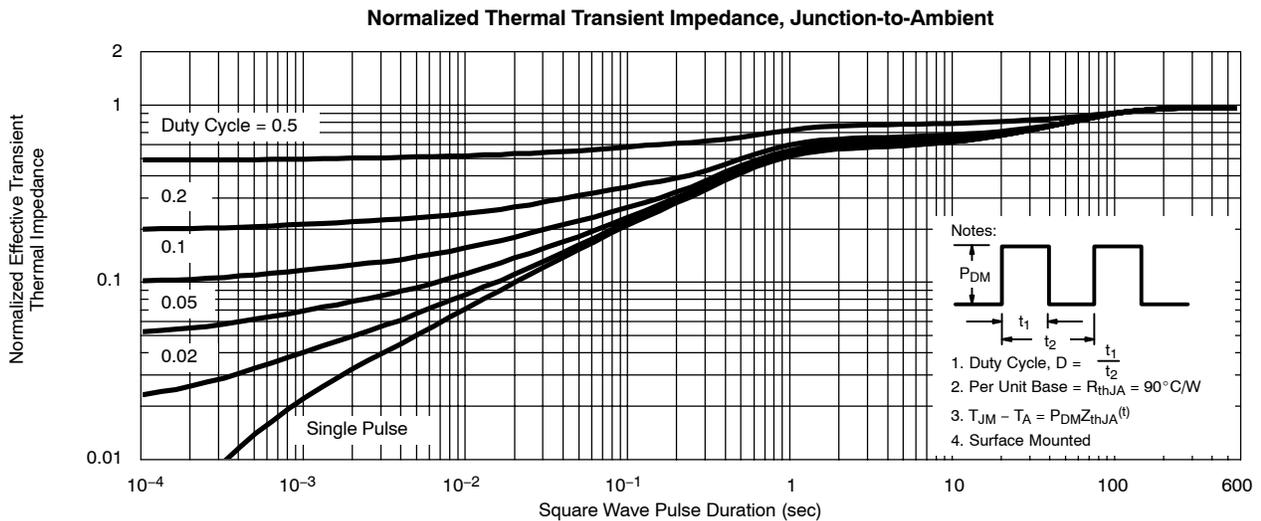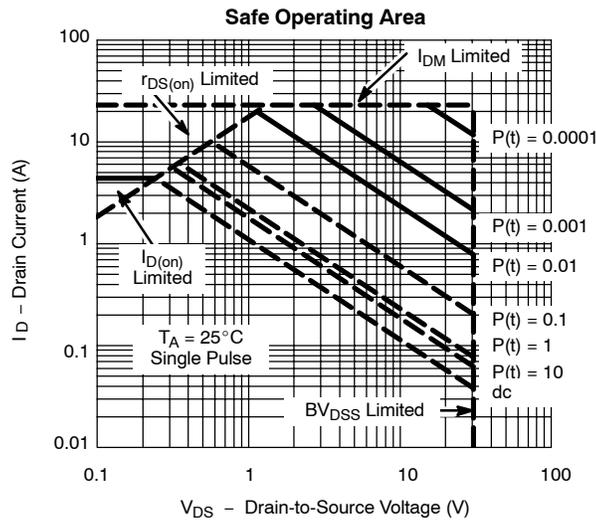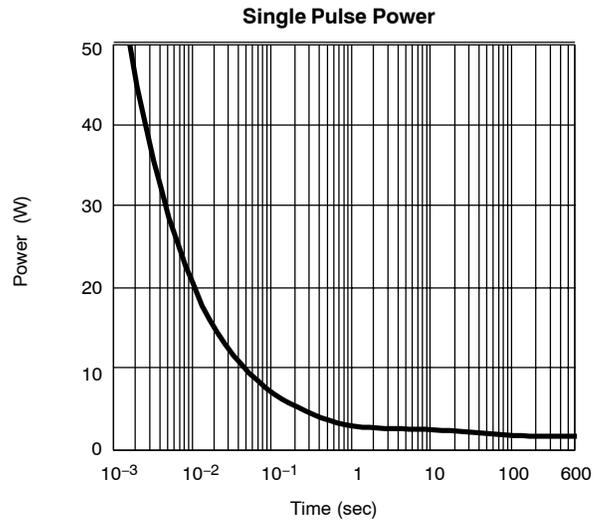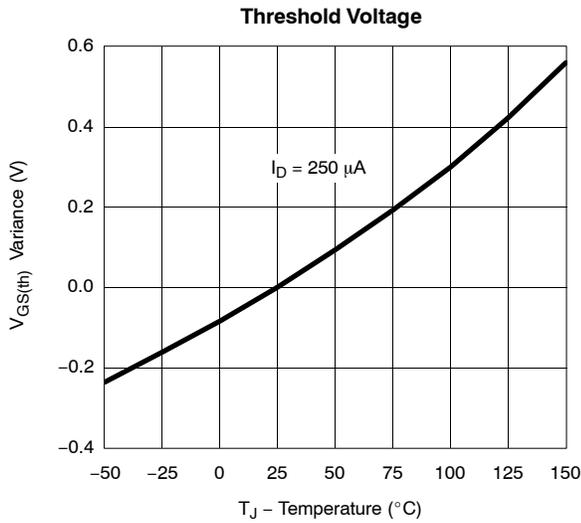



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

