

T10A series Sibod™

FEATURES

- Glass passivated junction
- High current diverting capability (150A, 8x20μs)
- Low capacitance, less than 100pF
- UL recognized
- Automatic reset
- Does not degrade

APPLICATION


- Bi-directional device for telephone and line card protection

ELECTRICAL CHARACTERISTICS (Tamb = +25°C)

SYMBOL	PARAMETER
V _{RM}	Stand-off Voltage
V _{BR}	Breakdown Voltage
I _H	Holding Current
V _R	Continuous Reverse Voltage

ABSOLUTE RATINGS (limiting values) (Tj = + 25°C) L = 10mm

SYMBOL	PARAMETER	VALUE	UNIT
P	Power dissipation on infinite heatsink	Tamb = 50°C	1.7 W
I _{pp}	Peak Pulse Current	10x1000μsec 10/700 1.5KV 8-20 us expo	50 A 37.5 100
I _{tsm}	Non-repetitive surge peak on-state current	t _p = 20 ms	30 A
di/dt	Critical rate of rise of on-state current	Non repetitive	100 A/us
T _{stg} T _j	Storage and operating junction Temperature range	-40 to 150 150	°C °C
T _l	Maximum lead temperature for soldering during 10s at 4mm from case	230	°C

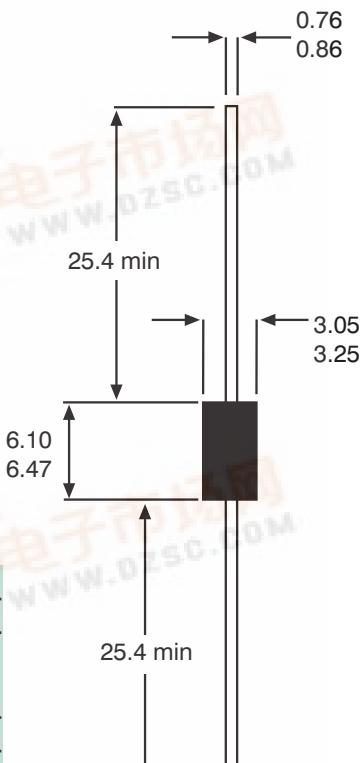

All dimensions in mm

THERMAL RESISTANCES

SYMBOL	PARAMETER	VALUE	UNIT
R _{th(j-i)}	Junction-leads on infinite heatsink	60 °C/W	
R _{th(j-a)}	Junction-ambient on printed circuit	100 °C/W	

All parameters are tested using Fet Test™ Model 3600

DEVICE TYPE	I _{RM} @ V _{RM} max		I _R @ V _R max		V _{BO} @ I _{BO} max		I _H min
	μA	V	μA	V	V	mA	
T10A062	2	56	50	62	82	800	150
T10A068	2	61	50	68	90	800	150
T10A100	2	90	50	100	133	800	150
T10A120	2	108	50	120	160	800	150
T10A130	2	117	50	130	173	800	150
T10A180	2	162	50	180	240	800	150
T10A200	2	180	50	200	267	800	150
T10A220	2	198	50	220	293	800	150
T10A240	2	216	50	240	320	800	150
T10A270	2	243	50	270	370	800	150

ORDERING INFORMATION

T10A

Voltage

Holding Current Option

Packaging Option

B = Bulk (500 pcs)

T = Tape and reeled (1500 pcs)