

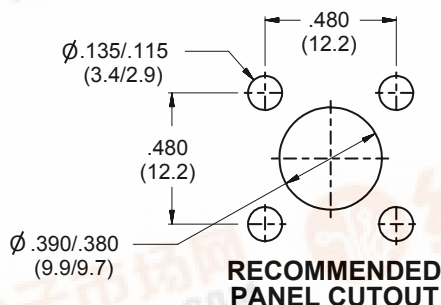


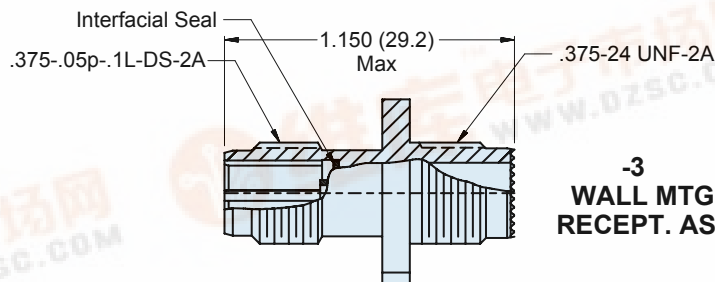

180-071 (-3) Wall Mount Single Channel Fiber Optic Receptacle Connector Environmental Resistant for Glenair 181-001 and 181-002 Termini

180-071-C 3 1

Product Series
Basic Number
Finish
(Table II)
3 = Wall Mounting
Receptacle Assembly
Alternate Key Position
(1,2,3,4, & 5) (Table I)


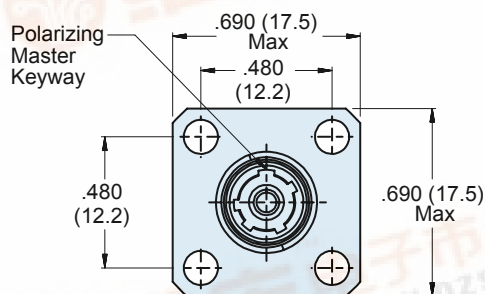


APPLICATION NOTES

- Assembly packaged in plastic bag and tag identified with manufacturer's name and part number.
- Glenair 180-071 Connector features:
 - Receptacle Body, Jam Nut Coupling Nut: Aluminum Alloy (See Table II).
 - Interfacial Seal: Fluorosilicone.
 - Fiber Optic Termini: Glenair 181 Series (Not supplied).
 - Operating Temperature Range: -55°C to +125°C.
- Metric dimensions (mm) are in parentheses.



**180-071 (-3) Wall Mount
Single Channel Fiber Optic Receptacle Connector
Environmental Resistant
for Glenair 181-001 and 181-002 Termini**

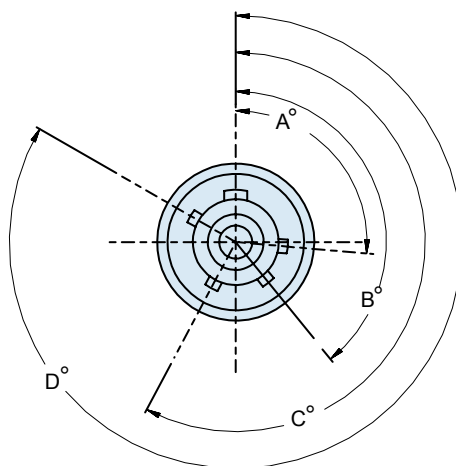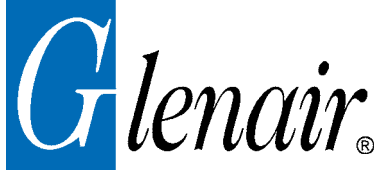

As Viewed from Rear of Connector

TABLE I: KEYWAY LOCATION				
Pos	A°	B°	C°	D°
1	95	141	208	300
2	80	141	208	300
3	95	141	223	300
4	80	141	223	300
5	95	141	208	275

TABLE II: FINISH		
SYM	MATERIAL	FINISH
C	Aluminum	Black Anodize
M	Aluminum	Electroless Nickel
NF	Aluminum	Cadmium, Olive Drab over Electroless Nickel
ZN	Aluminum	Zinc-Nickel, Olive Drab over Electroless Nickel
Z1	Stainless Steel	Passivate

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn