

[查询"FDMS3602S"供应商](#)
**FAIRCHILD**  
SEMICONDUCTOR®

September 2010

# FDMS3602S

## Dual N-Channel PowerTrench® MOSFET

N-Channel: 25 V, 30 A, 5.6 mΩ N-Channel: 25 V, 40 A, 2.2 mΩ

### Features

Q1: N-Channel

- Max  $r_{DS(on)}$  = 5.6 mΩ at  $V_{GS}$  = 10 V,  $I_D$  = 15 A
- Max  $r_{DS(on)}$  = 8.1 mΩ at  $V_{GS}$  = 4.5 V,  $I_D$  = 14 A

Q2: N-Channel

- Max  $r_{DS(on)}$  = 2.2 mΩ at  $V_{GS}$  = 10 V,  $I_D$  = 26 A
- Max  $r_{DS(on)}$  = 3.4 mΩ at  $V_{GS}$  = 4.5 V,  $I_D$  = 22 A
- Low inductance packaging shortens rise/fall times, resulting in lower switching losses
- MOSFET integration enables optimum layout for lower circuit inductance and reduced switch node ringing
- RoHS Compliant




### General Description

This device includes two specialized N-Channel MOSFETs in a dual PQFN package. The switch node has been internally connected to enable easy placement and routing of synchronous buck converters. The control MOSFET (Q1) and synchronous SyncFET (Q2) have been designed to provide optimal power efficiency.


### Applications

- Computing
- Communications
- General Purpose Point of Load
- Notebook VCore




Top

Power 56



Bottom

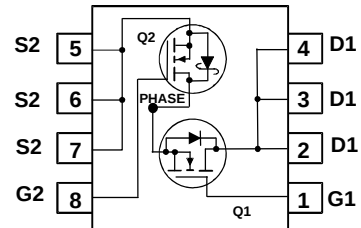

### MOSFET Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter                                                            | Q1                | Q2                | Units            |
|----------------|----------------------------------------------------------------------|-------------------|-------------------|------------------|
| $V_{DS}$       | Drain to Source Voltage                                              | 25                | 25                | V                |
| $V_{GS}$       | Gate to Source Voltage (Note 3)                                      | $\pm 20$          | $\pm 20$          | V                |
| $I_D$          | Drain Current -Continuous (Package limited) $T_C = 25^\circ\text{C}$ | 30                | 40                | A                |
|                | -Continuous (Silicon limited) $T_C = 25^\circ\text{C}$               | 65                | 135               |                  |
|                | -Continuous $T_A = 25^\circ\text{C}$                                 | 15 <sup>1a</sup>  | 26 <sup>1b</sup>  |                  |
|                | -Pulsed                                                              | 40                | 100               |                  |
| $E_{AS}$       | Single Pulse Avalanche Energy                                        | 50 <sup>4</sup>   | 144 <sup>5</sup>  | mJ               |
| $P_D$          | Power Dissipation for Single Operation $T_A = 25^\circ\text{C}$      | 2.2 <sup>1a</sup> | 2.5 <sup>1b</sup> | W                |
|                | Power Dissipation for Single Operation $T_A = 25^\circ\text{C}$      | 1.0 <sup>1c</sup> | 1.0 <sup>1d</sup> |                  |
| $T_J, T_{STG}$ | Operating and Storage Junction Temperature Range                     | -55 to +150       |                   | $^\circ\text{C}$ |

### Thermal Characteristics

|                 |                                         |                   |                   |                    |
|-----------------|-----------------------------------------|-------------------|-------------------|--------------------|
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient | 57 <sup>1a</sup>  | 50 <sup>1b</sup>  | $^\circ\text{C/W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient | 125 <sup>1c</sup> | 120 <sup>1d</sup> |                    |
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case    | 3.5               | 2                 |                    |

### Package Marking and Ordering Information

| Device Marking | Device    | Package  | Reel Size | Tape Width | Quantity   |
|----------------|-----------|----------|-----------|------------|------------|
| 220A<br>N70C   | FDMS3602S | Power 56 | 13"       | 12 mm      | 3000 units |

# Preliminary Datasheet

[查询"FDMS3602S"供应商](#)

## Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Type | Min | Typ | Max | Units |
|--------|-----------|-----------------|------|-----|-----|-----|-------|
|--------|-----------|-----------------|------|-----|-----|-----|-------|

### Off Characteristics

|                                      |                                           |                                                                                                                         |          |          |          |            |                      |
|--------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|------------|----------------------|
| $BV_{DSS}$                           | Drain to Source Breakdown Voltage         | $I_D = 250\ \mu\text{A}$ , $V_{GS} = 0\ \text{V}$<br>$I_D = 1\ \text{mA}$ , $V_{GS} = 0\ \text{V}$                      | Q1<br>Q2 | 25<br>25 |          |            | V                    |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = 250\ \mu\text{A}$ , referenced to $25^\circ\text{C}$<br>$I_D = 10\ \text{mA}$ , referenced to $25^\circ\text{C}$ | Q1<br>Q2 |          | 20<br>20 |            | mV/ $^\circ\text{C}$ |
| $I_{DSS}$                            | Zero Gate Voltage Drain Current           | $V_{DS} = 20\ \text{V}$ , $V_{GS} = 0\ \text{V}$                                                                        | Q1<br>Q2 |          |          | 1<br>500   | $\mu\text{A}$        |
| $I_{GSS}$                            | Gate to Source Leakage Current, Forward   | $V_{GS} = 20\ \text{V}$ , $V_{DS} = 0\ \text{V}$                                                                        | Q1<br>Q2 |          |          | 100<br>100 | nA                   |

### On Characteristics

|                                        |                                                          |                                                                                                                                                                                 |          |        |                   |                   |                      |
|----------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------|-------------------|-------------------|----------------------|
| $V_{GS(th)}$                           | Gate to Source Threshold Voltage                         | $V_{GS} = V_{DS}$ , $I_D = 250\ \mu\text{A}$<br>$V_{GS} = V_{DS}$ , $I_D = 1\ \text{mA}$                                                                                        | Q1<br>Q2 | 1<br>1 | 1.8<br>1.9        | 3<br>3            | V                    |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate to Source Threshold Voltage Temperature Coefficient | $I_D = 250\ \mu\text{A}$ , referenced to $25^\circ\text{C}$<br>$I_D = 10\ \text{mA}$ , referenced to $25^\circ\text{C}$                                                         | Q1<br>Q2 |        | -6<br>-5          |                   | mV/ $^\circ\text{C}$ |
| $r_{DS(on)}$                           | Static Drain to Source On Resistance                     | $V_{GS} = 10\ \text{V}$ , $I_D = 15\ \text{A}$<br>$V_{GS} = 4.5\ \text{V}$ , $I_D = 14\ \text{A}$<br>$V_{GS} = 10\ \text{V}$ , $I_D = 15\ \text{A}$ , $T_J = 125^\circ\text{C}$ | Q1       |        | 4.4<br>6.2<br>5.9 | 5.6<br>8.1<br>8.7 | m $\Omega$           |
|                                        |                                                          | $V_{GS} = 10\ \text{V}$ , $I_D = 26\ \text{A}$<br>$V_{GS} = 4.5\ \text{V}$ , $I_D = 22\ \text{A}$<br>$V_{GS} = 10\ \text{V}$ , $I_D = 26\ \text{A}$ , $T_J = 125^\circ\text{C}$ | Q2       |        | 1.7<br>2.6<br>2.5 | 2.2<br>3.4<br>3.9 |                      |
| $g_{FS}$                               | Forward Transconductance                                 | $V_{DD} = 5\ \text{V}$ , $I_D = 15\ \text{A}$<br>$V_{DD} = 5\ \text{V}$ , $I_D = 26\ \text{A}$                                                                                  | Q1<br>Q2 |        | 67<br>132         |                   | S                    |

### Dynamic Characteristics

|           |                              |                                                                              |          |            |              |              |          |
|-----------|------------------------------|------------------------------------------------------------------------------|----------|------------|--------------|--------------|----------|
| $C_{iss}$ | Input Capacitance            | Q1<br>$V_{DS} = 13\ \text{V}$ , $V_{GS} = 0\ \text{V}$ , $f = 1\ \text{MHz}$ | Q1<br>Q2 |            | 1330<br>3260 | 1770<br>4335 | pF       |
| $C_{oss}$ | Output Capacitance           | Q2                                                                           | Q1<br>Q2 |            | 358<br>892   | 475<br>1185  | pF       |
| $C_{rss}$ | Reverse Transfer Capacitance | $V_{DS} = 13\ \text{V}$ , $V_{GS} = 0\ \text{V}$ , $f = 1\ \text{MHz}$       | Q1<br>Q2 |            | 61<br>145    | 90<br>220    | pF       |
| $R_g$     | Gate Resistance              |                                                                              | Q1<br>Q2 | 0.2<br>0.2 | 0.6<br>0.9   | 2.0<br>3.0   | $\Omega$ |

### Switching Characteristics


|              |                               |                                                                        |          |  |            |          |    |
|--------------|-------------------------------|------------------------------------------------------------------------|----------|--|------------|----------|----|
| $t_{d(on)}$  | Turn-On Delay Time            | Q1                                                                     | Q1<br>Q2 |  | 7.9<br>12  | 16<br>22 | ns |
| $t_r$        | Rise Time                     | $V_{DD} = 13\ \text{V}$ , $I_D = 15\ \text{A}$ , $R_{GEN} = 6\ \Omega$ | Q1<br>Q2 |  | 2<br>4.2   | 10<br>10 | ns |
| $t_{d(off)}$ | Turn-Off Delay Time           | Q2                                                                     | Q1<br>Q2 |  | 19<br>31   | 34<br>50 | ns |
| $t_f$        | Fall Time                     | $V_{DD} = 13\ \text{V}$ , $I_D = 26\ \text{A}$ , $R_{GEN} = 6\ \Omega$ | Q1<br>Q2 |  | 1.8<br>3.2 | 10<br>10 | ns |
| $Q_{g(TOT)}$ | Total Gate Charge             | $V_{GS} = 0\ \text{V}$ to $10\ \text{V}$                               | Q1<br>Q2 |  | 19<br>45   | 27<br>64 | nC |
| $Q_{g(TOT)}$ | Total Gate Charge             | $V_{GS} = 0\ \text{V}$ to $4.5\ \text{V}$                              | Q1<br>Q2 |  | 9<br>21    | 13<br>30 | nC |
| $Q_{gs}$     | Gate to Source Charge         |                                                                        | Q1<br>Q2 |  | 3.9<br>9.1 |          | nC |
| $Q_{gd}$     | Gate to Drain "Miller" Charge |                                                                        | Q1<br>Q2 |  | 2.4<br>5.3 |          | nC |

查询"FDMS3602S"供应商

Electrical Characteristics  $T_J = 25^{\circ}\text{C}$  unless otherwise noted

| Symbol                             | Parameter                          | Test Conditions                                                                                              | Type     | Min | Typ        | Max        | Units |
|------------------------------------|------------------------------------|--------------------------------------------------------------------------------------------------------------|----------|-----|------------|------------|-------|
| Drain-Source Diode Characteristics |                                    |                                                                                                              |          |     |            |            |       |
| $V_{SD}$                           | Source-Drain Diode Forward Voltage | $V_{GS} = 0\text{ V}$ , $I_S = 15\text{ A}$ (Note 2)<br>$V_{GS} = 0\text{ V}$ , $I_S = 26\text{ A}$ (Note 2) | Q1<br>Q2 |     | 0.8<br>0.8 | 1.2<br>1.2 | V     |
| $t_{rr}$                           | Reverse Recovery Time              | Q1<br>$I_F = 15\text{ A}$ , $di/dt = 100\text{ A/s}$                                                         | Q1<br>Q2 |     | 21<br>28   | 34<br>44   | ns    |
| $Q_{rr}$                           | Reverse Recovery Charge            | Q2<br>$I_F = 26\text{ A}$ , $di/dt = 300\text{ A/s}$                                                         | Q1<br>Q2 |     | 6.6<br>28  | 13<br>44   | nC    |

- Notes:
1.  $R_{\theta JA}$  is determined with the device mounted on a 1 in<sup>2</sup> pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta CA}$  is determined by the user's board design.




a. 57 °C/W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper



b. 50 °C/W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper



c. 125 °C/W when mounted on a minimum pad of 2 oz copper



d. 120 °C/W when mounted on a minimum pad of 2 oz copper

2. Pulse Test: Pulse Width < 300  $\mu\text{s}$ , Duty cycle < 2.0%.
3. As an N-ch device, the negative Vgs rating is for low duty cycle pulse occurrence only. No continuous rating is implied.
4.  $E_{AS}$  of 50 mJ is based on starting  $T_J = 25^{\circ}\text{C}$ ; N-ch:  $L = 1\text{ mH}$ ,  $I_{AS} = 10\text{ A}$ ,  $V_{DD} = 23\text{ V}$ ,  $V_{GS} = 10\text{ V}$ . 100% test at  $L = 0.3\text{ mH}$ ,  $I_{AS} = 15\text{ A}$ .
5.  $E_{AS}$  of 144 mJ is based on starting  $T_J = 25^{\circ}\text{C}$ ; N-ch:  $L = 1\text{ mH}$ ,  $I_{AS} = 17\text{ A}$ ,  $V_{DD} = 23\text{ V}$ ,  $V_{GS} = 10\text{ V}$ . 100% test at  $L = 0.3\text{ mH}$ ,  $I_{AS} = 25\text{ A}$ .

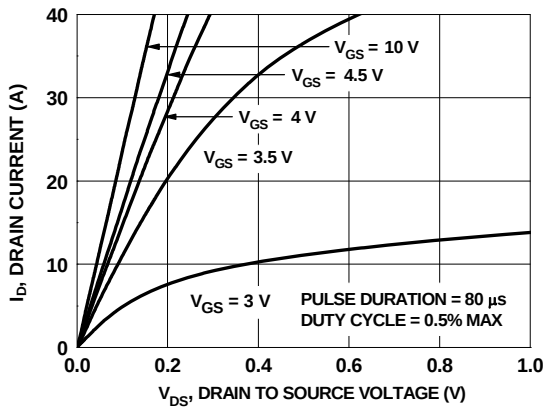
[查询"FDMS3602S"供应商](#)**Typical Characteristics (Q1 N-Channel)**  $T_J = 25^\circ\text{C}$  unless otherwise noted

Figure 1. On Region Characteristics

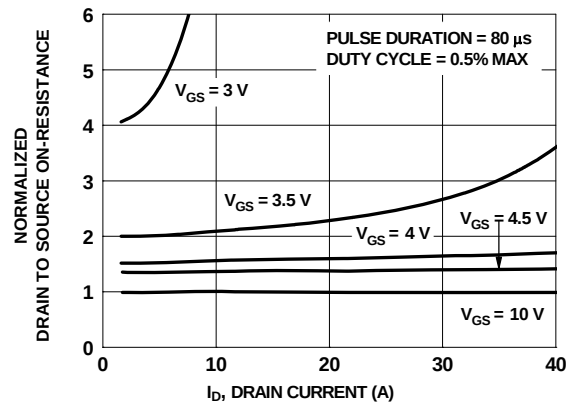


Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

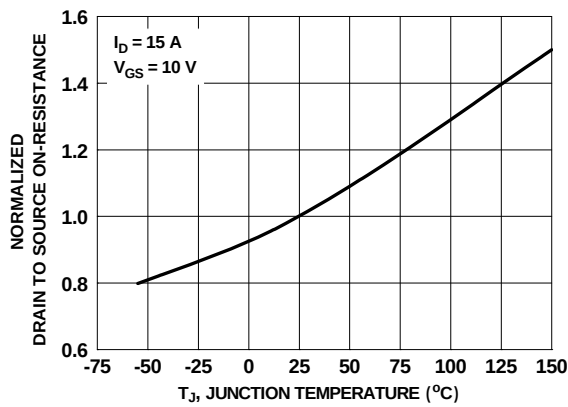


Figure 3. Normalized On Resistance vs Junction Temperature

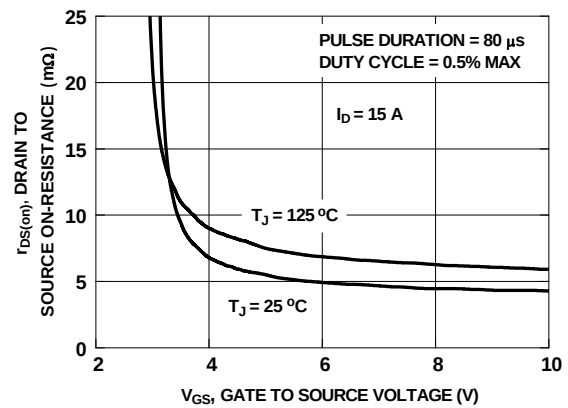


Figure 4. On-Resistance vs Gate to Source Voltage

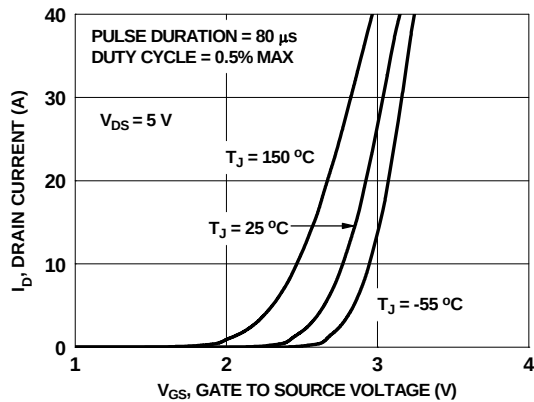


Figure 5. Transfer Characteristics

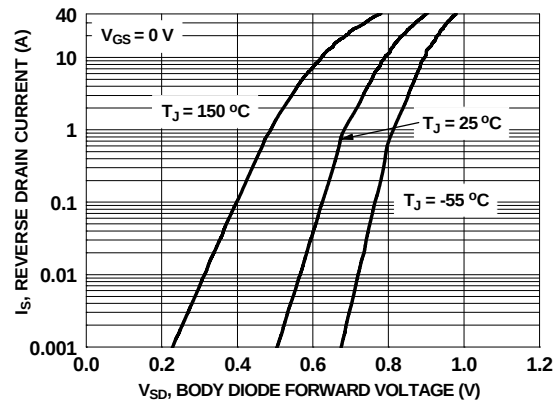


Figure 6. Source to Drain Diode Forward Voltage vs Source Current

[查询"FDMS3602S"供应商](#)

# Typical Characteristics (Q1 N-Channel) $T_J = 25^\circ\text{C}$ unless otherwise noted

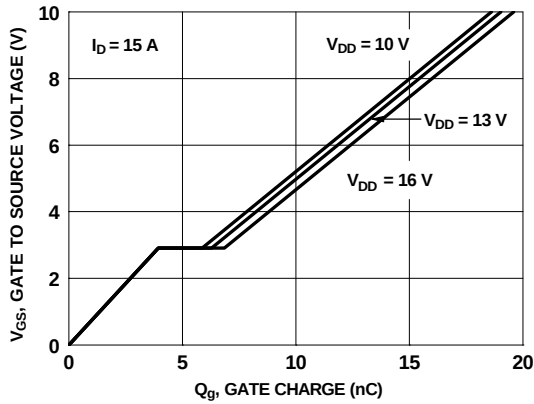


Figure 7. Gate Charge Characteristics

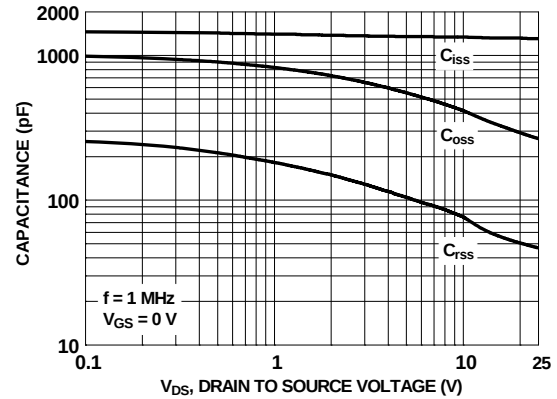


Figure 8. Capacitance vs Drain to Source Voltage

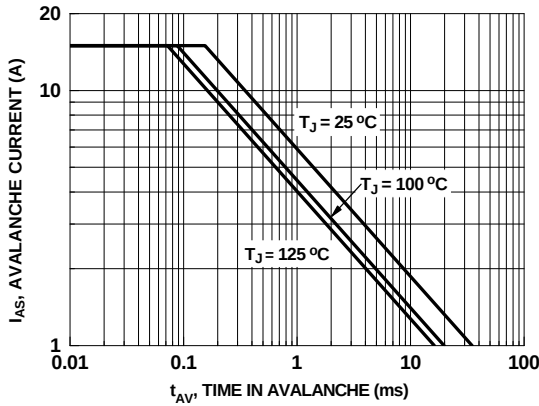


Figure 9. Unclamped Inductive Switching Capability

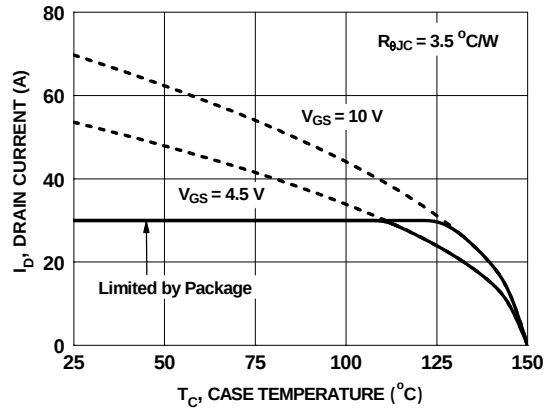


Figure 10. Maximum Continuous Drain Current vs Case Temperature

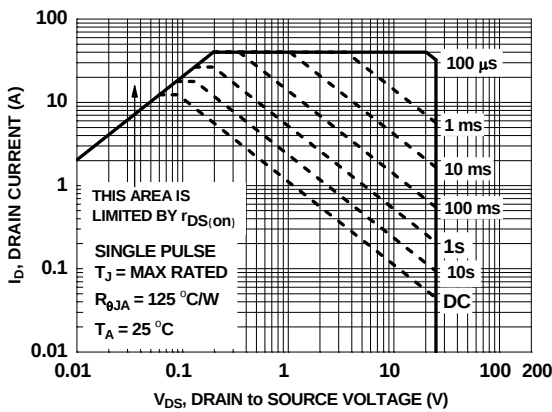


Figure 11. Forward Bias Safe Operating Area

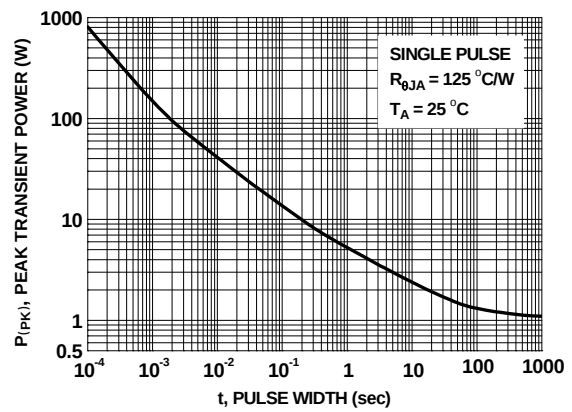
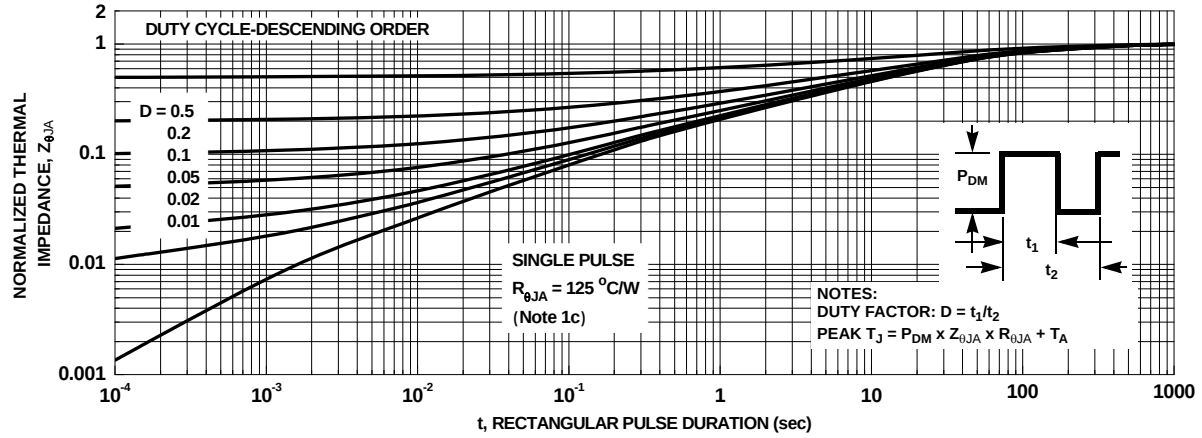


Figure 12. Single Pulse Maximum Power Dissipation

[查询"FDMS3602S"供应商](#)**Typical Characteristics (Q1 N-Channel)**  $T_J = 25^\circ\text{C}$  unless otherwise noted**Figure 13. Junction-to-Ambient Transient Thermal Response Curve**

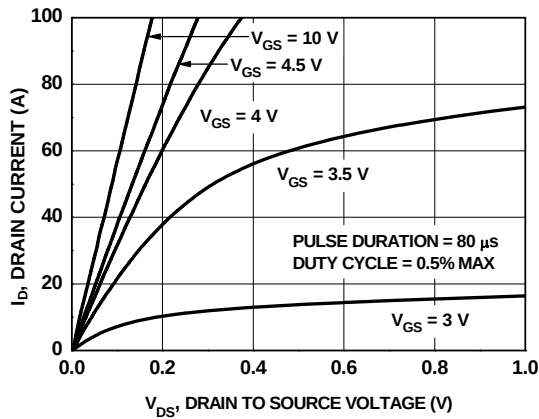
[查询"FDMS3602S"供应商](#)
**Typical Characteristics (Q2 N-Channel)**  $T_J = 25^\circ\text{C}$  unless otherwise noted


Figure 14. On-Region Characteristics

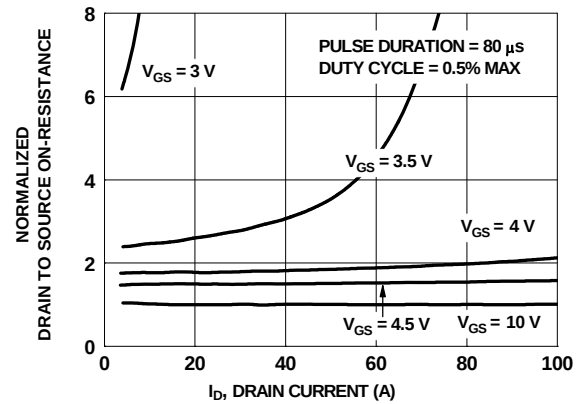


Figure 15. Normalized on-Resistance vs Drain Current and Gate Voltage

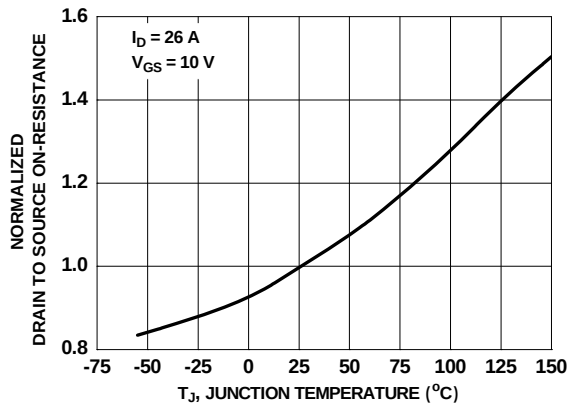


Figure 16. Normalized On-Resistance vs Junction Temperature

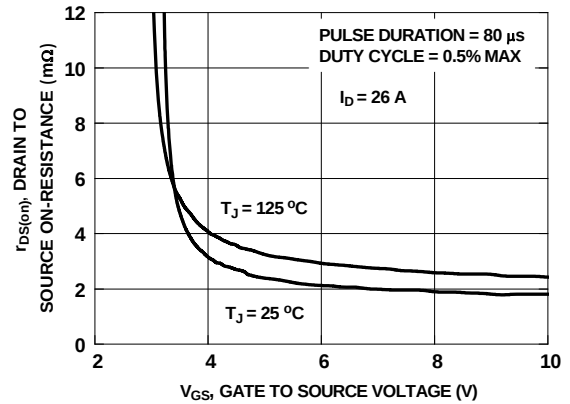


Figure 17. On-Resistance vs Gate to Source Voltage

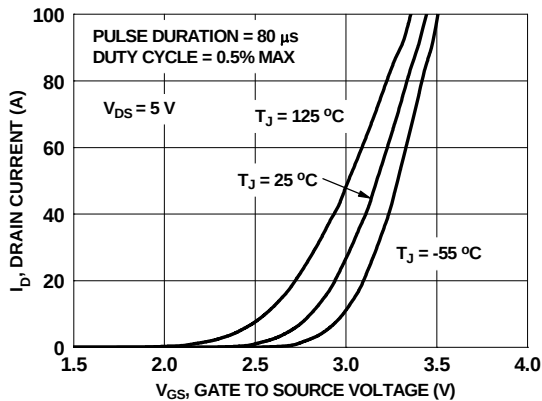


Figure 18. Transfer Characteristics

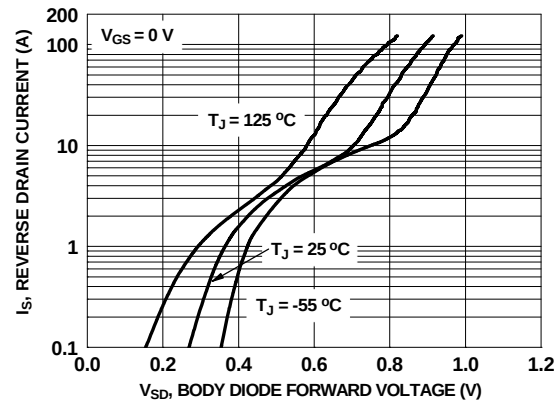


Figure 19. Source to Drain Diode Forward Voltage vs Source Current

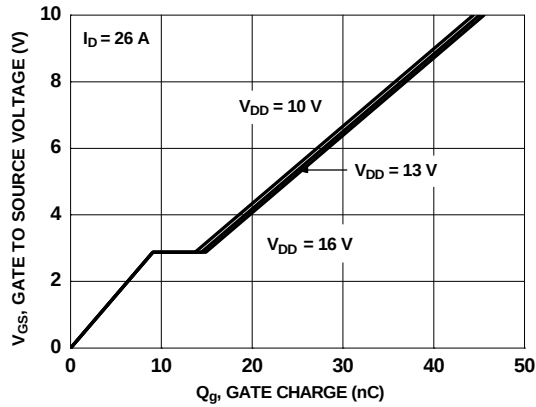
[查询"FDMS3602S"供应商](#)**Typical Characteristics (Q2 N-Channel)**  $T_J = 25^\circ\text{C}$  unless otherwise noted

Figure 20. Gate Charge Characteristics

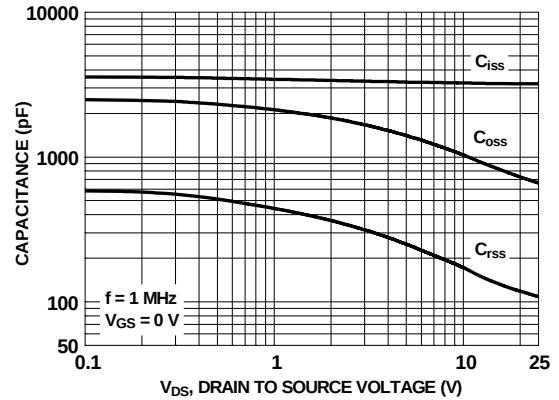


Figure 21. Capacitance vs Drain to Source Voltage

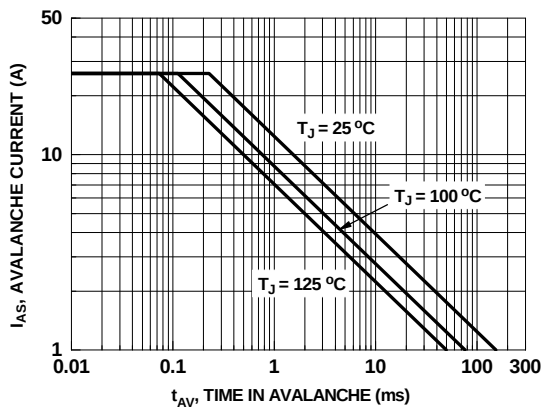


Figure 22. Unclamped Inductive Switching Capability

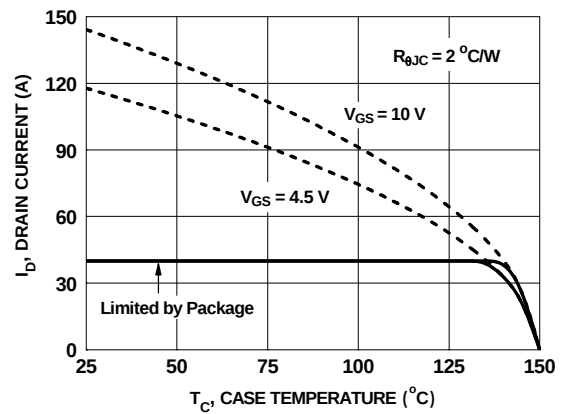


Figure 23. Maximum Continuous Drain Current vs Case Temperature

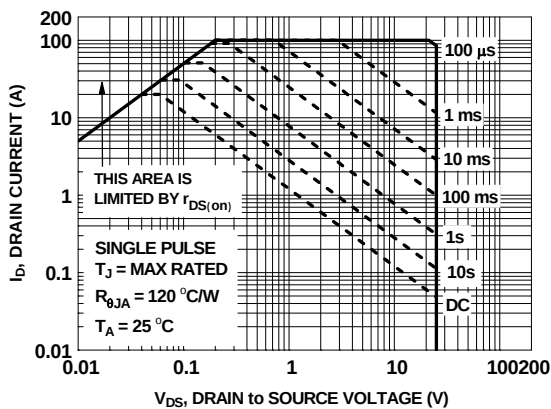


Figure 24. Forward Bias Safe Operating Area

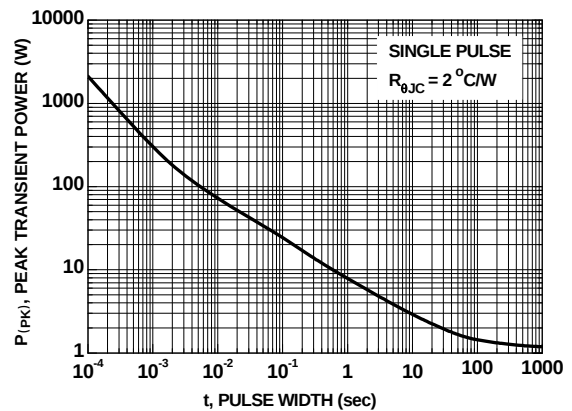
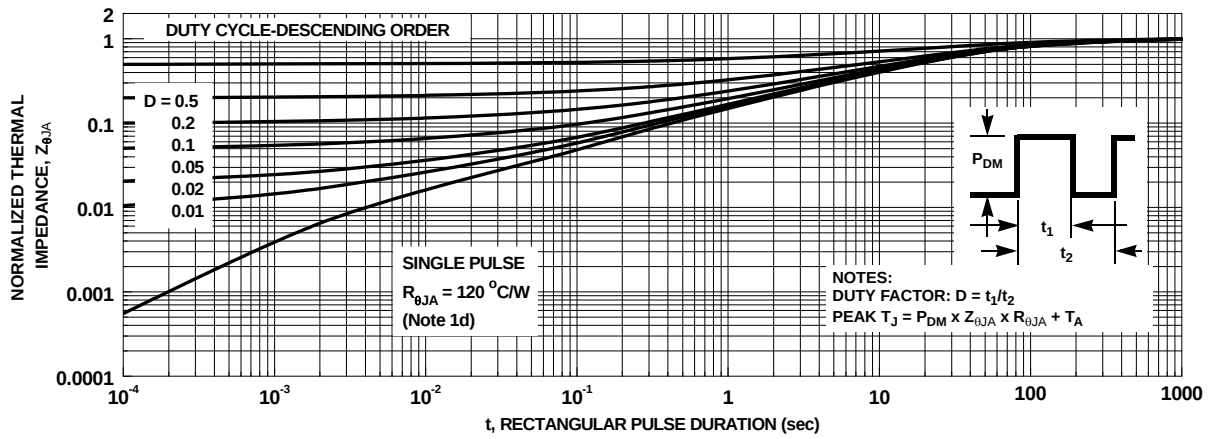


Figure 25. Single Pulse Maximum Power Dissipation

[查询"FDMS3602S"供应商](#)**Typical Characteristics (Q2 N-Channel)**  $T_J = 25^\circ\text{C}$  unless otherwise noted**Figure 26. Junction-to-Ambient Transient Thermal Response Curve**

[查询"FDMS3602S"供应商](#)**Typical Characteristics** (continued)**SyncFET Schottky body diode  
Characteristics**

Fairchild's SyncFET process embeds a Schottky diode in parallel with PowerTrench MOSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 27 shows the reverse recovery characteristic of the FDMS3602S.

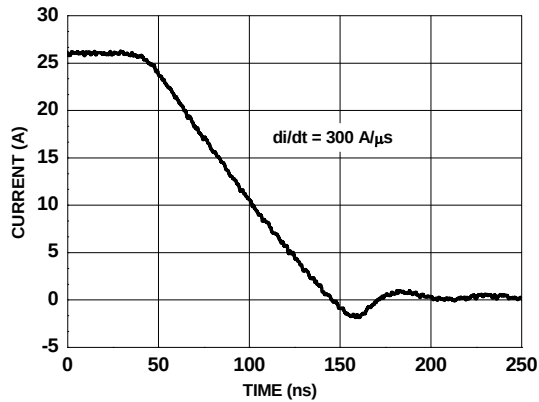


Figure 27. FDMS3602S SyncFET body diode reverse recovery characteristic

Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.


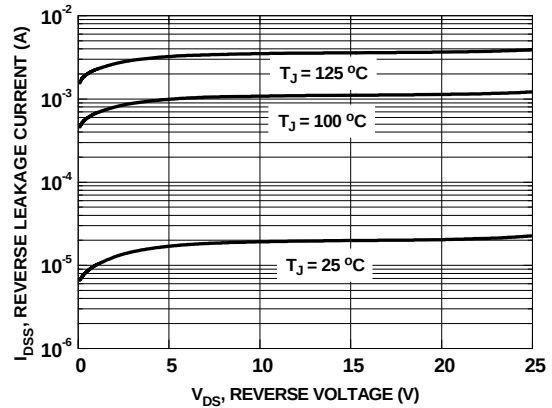


Figure 28. SyncFET body diode reverse leakage versus drain-source voltage

[查询"FDMS3602S"供应商](#)

# Dimensional Outline and Pad Layout

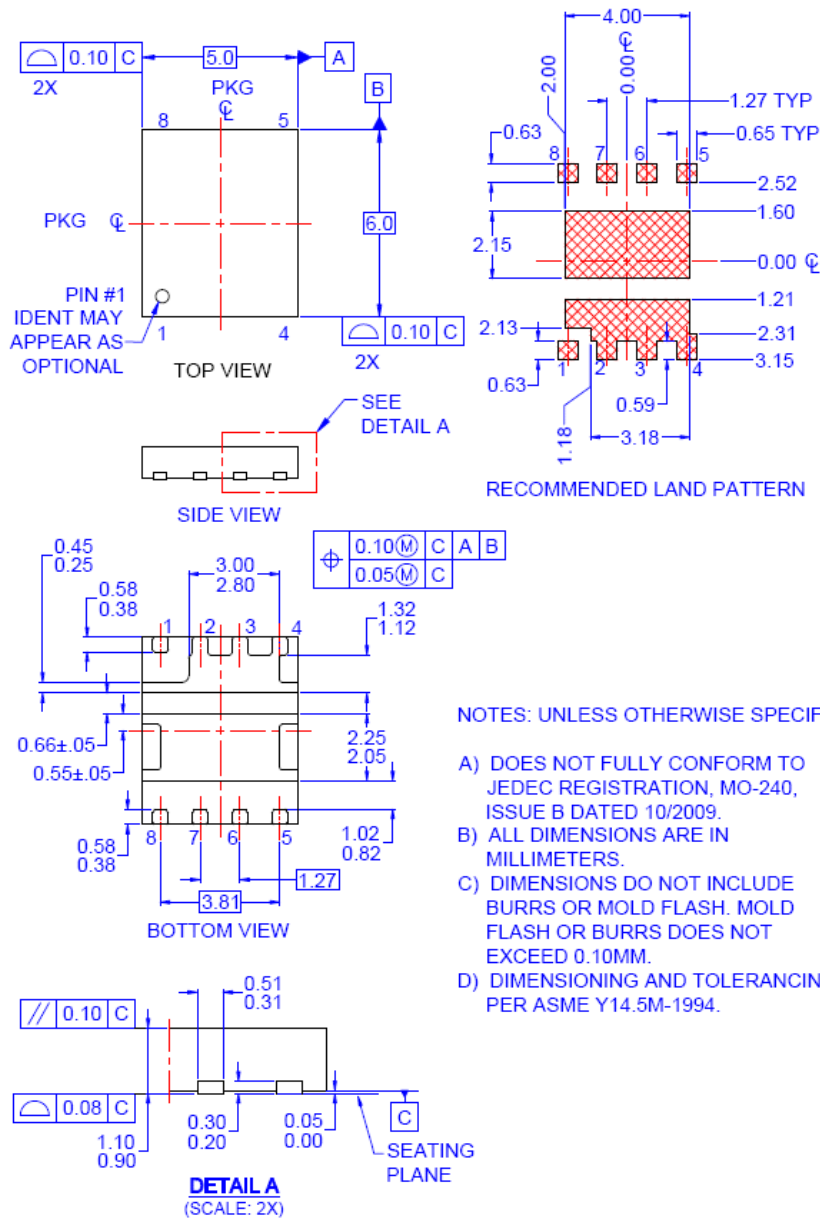

查询"FDMS3602S"供应商

**FAIRCHILD**  
 SEMICONDUCTOR®
**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™  
 Auto-SPM™  
 Build it Now™  
 CorePLUS™  
 CorePOWER™  
 CROSSVOLT™  
 CTL™  
 Current Transfer Logic™  
 DEUXPEED®  
 Dual Cool™  
 EcoSPARK®  
 EfficientMax™  
 ESBC™  
**F**®  
 Fairchild®  
 Fairchild Semiconductor®  
 FACT Quiet Series™  
 FACT®  
 FAST®  
 FastvCore™  
 FETBench™  
 FlashWriter® \*  
 FPS™

F-PFS™  
 FRFET®  
 Global Power ResourceSM  
 Green FPS™  
 Green FPS™ e-Series™  
 Gmax™  
 GTO™  
 IntelliMAX™  
 ISOPLANAR™  
 MegaBuck™  
 MICROCOUPLER™  
 MicroFET™  
 MicroPak™  
 MicroPak2™  
 MillerDrive™  
 MotionMax™  
 Motion-SPM™  
 OptiHiT™  
 OPTOLOGIC®  
 OPTOPLANAR®  
  
 PDP SPM™

Power-SPM™  
 PowerTrench®  
 PowerXS™  
 Programmable Active Droop™  
 QFET®  
 QS™  
 Quiet Series™  
 RapidConfigure™  
  
 Saving our world, 1mW/W/kW at a time™  
 SignalWise™  
 SmartMax™  
 SMART START™  
 SPM®  
 STEALTH™  
 SuperFET™  
 SuperSOT™-3  
 SuperSOT™-6  
 SuperSOT™-8  
 SupreMOS™  
 SyncFET™  
 Sync-Lock™

**SYSTEM**®  
 GENERAL  
 The Power Franchise®  
 the power franchise®  
 TinyBoost™  
 TinyBuck™  
 TinyCalc™  
 TinyLogic®  
 TINYOPTO™  
 TinyPower™  
 TinyPWM™  
 TinyWire™  
 TriFault Detect™  
 TRUECURRENT™\*  
 μSerDes™  
  
 UHC®  
 Ultra FRFET™  
 UniFET™  
 VCX™  
 VisualMax™  
 XS™

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

**PRODUCT STATUS DEFINITIONS****Definition of Terms**

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. 148