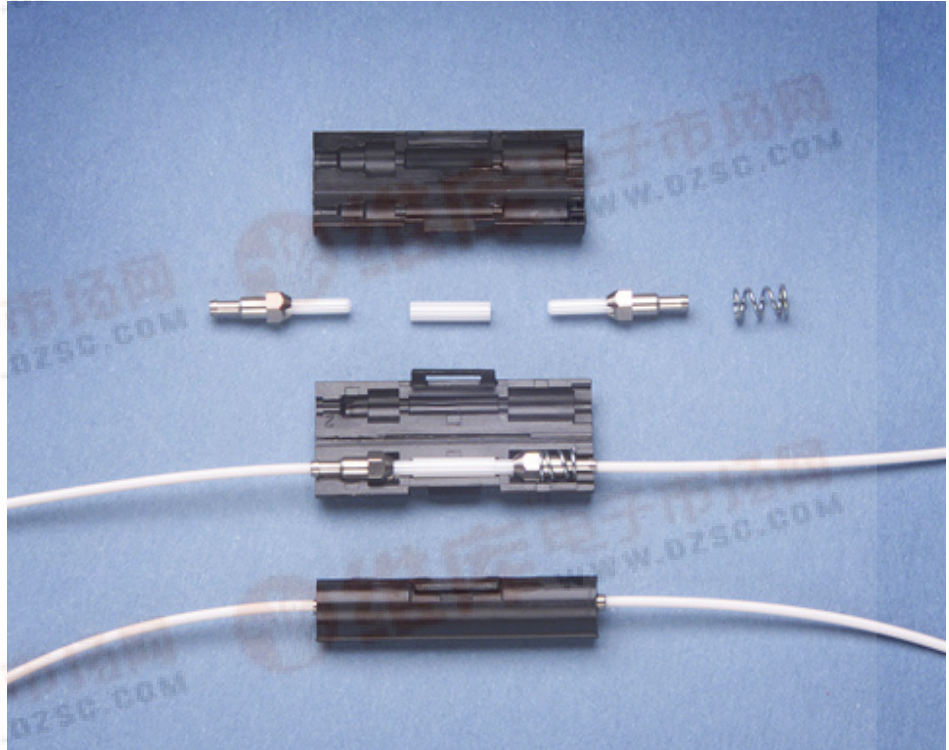


Compact and re-matable optical interconnect in the footprint of a fusion splice

The SnapMate Optical Interconnect System provides the benefits of a re-matable optical connector with the small size of an optical fusion splice. It is designed using high-precision singlemode LC connector and adapter components and a compact, re-usable polymer housing, providing a reduced overall size and optimum optical performance.

The SnapMate's one-inch long receptacle connects the terminated LC-style ceramic ferrules with a ceramic alignment sleeve. This design allows the receptacle to be easily opened and re-assembled for removal and re-mating of the optical components. The low-cylindrical profile of the assembly and short overall length are suitable for use within equipment and can be incorporated onto a circuit board without consuming substantial mounting space or obstructing the air-flow path within a system.

The SnapMate Interconnect System complements Molex's existing robust line of optical products. For more information on optical product offerings, please visit: www.molex.com/fiber.


Features and Benefits

- Ceramic ferrule and alignment sleeve provides high-precision components with industry-proven low insertion loss
- Low-profile housing minimizes required mounting space on PCB and allows air-flow path to be practically unobstructed
- Re-usable housing (up to 5 mating cycles) allows for testing and reconfiguration to achieve optimum performance

SPECIFICATIONS
Reference Information

Packaging: Individual bag
 Designed In: Millimeters

Mechanical

Durability:

Plugs: ≥ 200 mate and de-mate cycles

Housing: 5 cycles min.

Insertion Loss: $\leq 0.15\text{dB}$ typical

Physical

Housing: Polymer

Ferrule: Zirconia Ceramic

Alignment Sleeve: Zirconia Ceramic

Operating Temperature: -40 to $+85^{\circ}\text{C}$

APPLICATIONS

[查询"106073-0022"供应商](#)



SnapMate™
Optical Interconnect System


106073

■ Telecommunication Equipment

- Servers
- Switches
- Routers

■ Other Markets

- Storage servers
- Test equipment
- OEM equipment

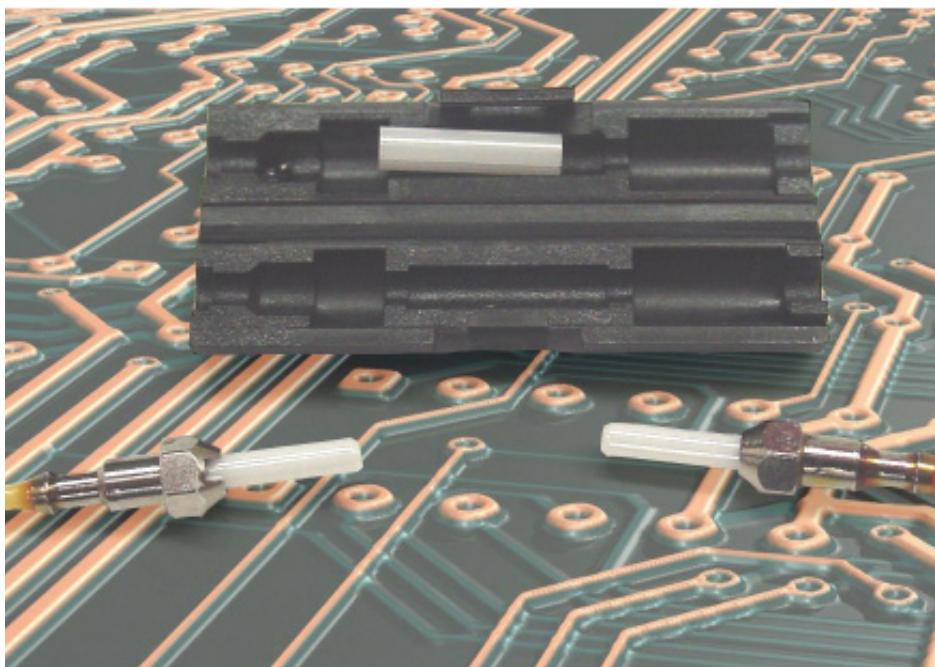

ORDERING INFORMATION

	Order No.	Mode	Components
	106073-0020	Singlemode	Complete Kit: (1) Housing, (2) LC Plugs with Ceramic Ferrules, (1) Spring, (1) Alignment Sleeve
	106073-0021		(1) Housing, (1) Alignment Sleeve
	106073-0022		(1) LC Plug with Ceramic Ferrule, (1) Spring
	106073-0023		(1) LC Plug with Ceramic Ferrule

Americas Headquarters
Lisle, Illinois 60532 U.S.A.
1-800-78MOLEX
amerinfo@molex.com

Far East North Headquarters
Yamato, Kanagawa, Japan
81-462-65-2324
feninfo@molex.com

Far East South Headquarters
Jurong, Singapore
65-6-268-6868
fesinfo@molex.com

European Headquarters
Munich, Germany
49-89-413092-0
eurinfo@molex.com

Corporate Headquarters
2222 Wellington Ct.
Lisle, IL 60532 U.S.A.
630-969-4550
Fax: 630-969-1352

Visit our website at www.molex.com/product/snapmate.html