

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

.19

查询390261的供应商

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

AG

53

P

LTR

DESCRIPTION

DATE

DWN

APVD



C

REV PER 0G3C-0046-00




15MAR00

BH

HDW

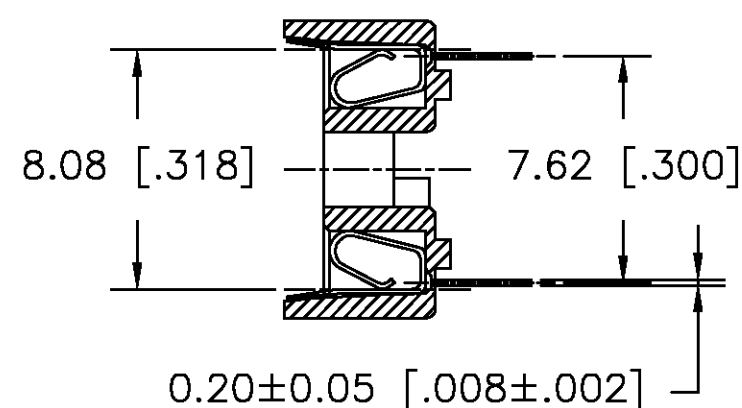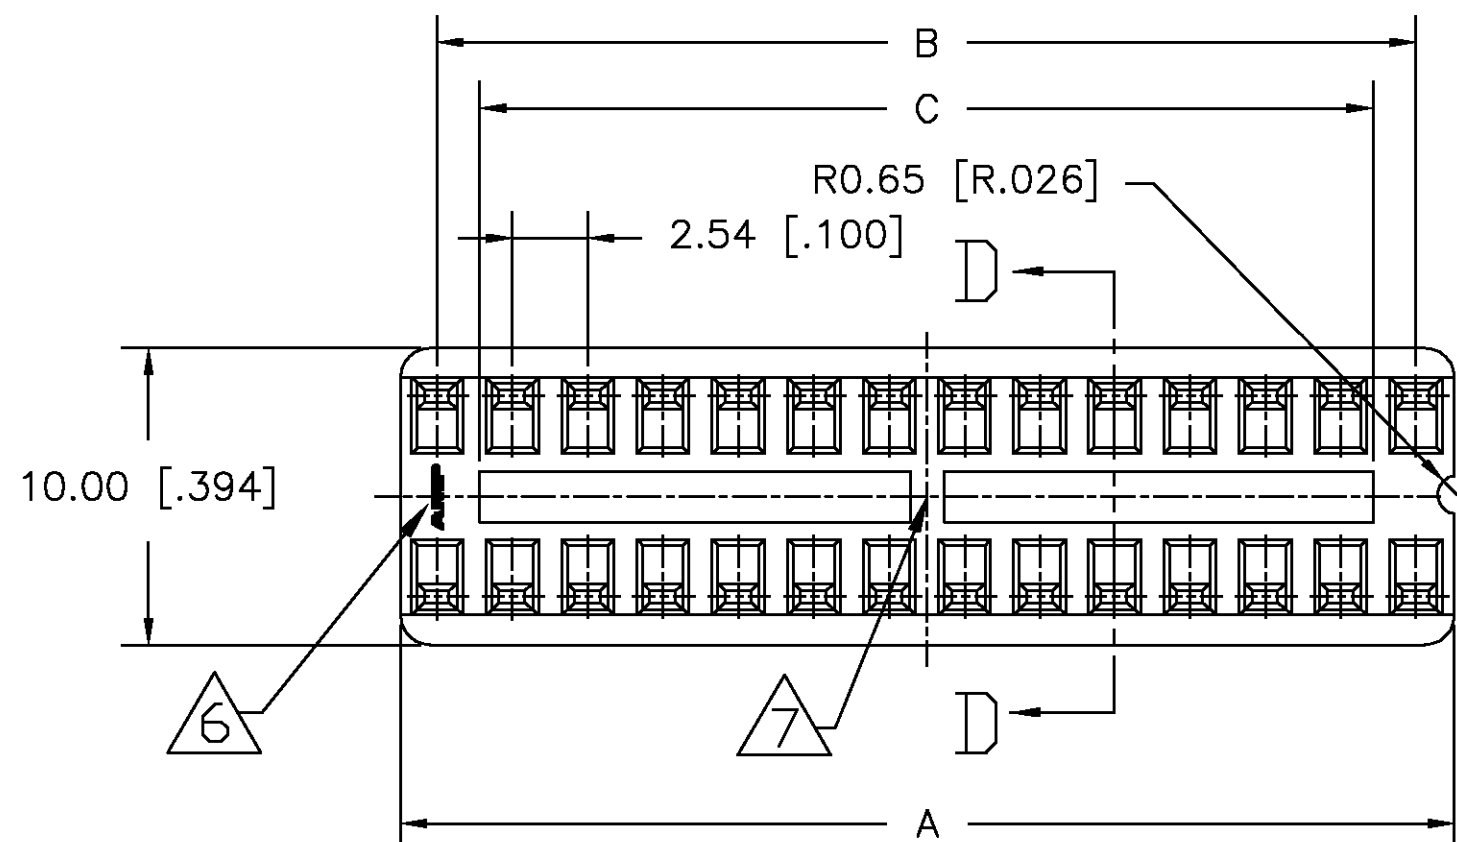


SECTION D-D

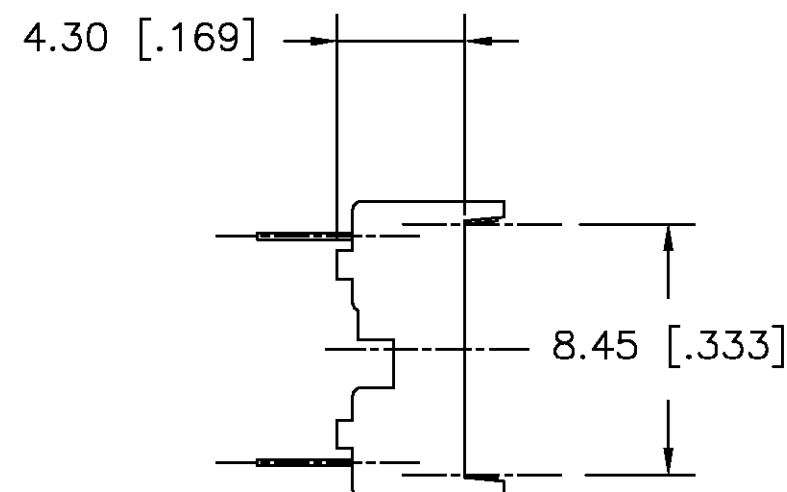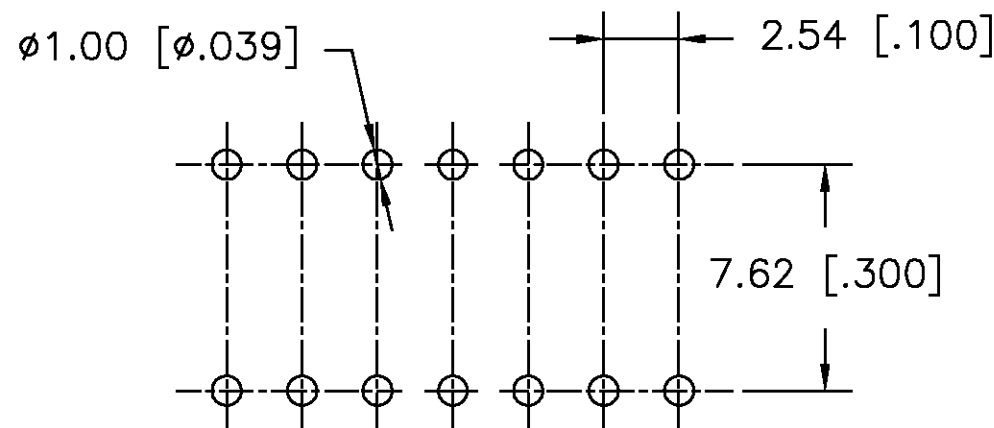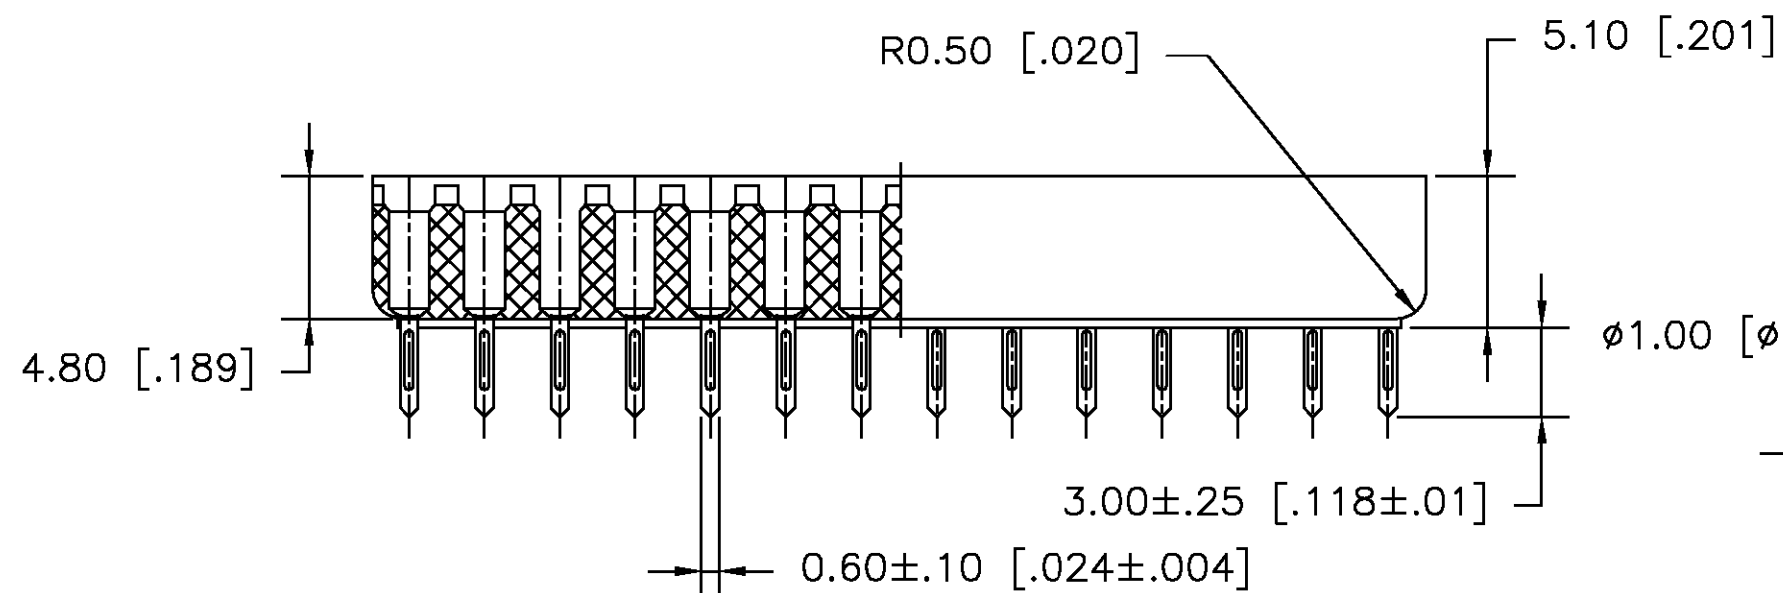

- 1 MATERIAL:
HOUSING: 25% GLASS FILLED PBT, THERMOPLASTIC, BLACK.
CONTACT: PHOS BRONZE
- 2 FINISH: CONTACT PLATING: TIN-LEAD (60μ INCHES MIN.)
3. MECHANICAL SPECS:
DURABILITY: 50 CYCLES MIN.
INSERTION FORCE: 300 GRAMS MAX.
WITHDRAWAL FORCE: 20 GRAMS MIN.
CONTACT RETENTION: 500 GRAMS MIN.
SOLDERABILITY: 95% COVERAGE MIN.
TEST TEMPERATURE = 230°±5°C
TEST TIME = 5±5 SEC.
ACCEPTS: 0.20-0.30 [0.008-0.012] LEADS
4. ELECTRICAL SPECS:
VOLTAGE RATING: 250V AC,DC
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
CURRENT RATING: 1 AMPERE AC,DC
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V MIN.
5. OPERATING TEMPERATURE: -40°C TO +105°C
- 6 AMP LOGO
- 7 LADDER PRESENT FOR 24, 28 & 32 POSITION SOCKETS.


POS	A±0.10 [0.04]	B±0.10 [0.04]	C±0.15 [0.04]	PART NO.
6	7.62 [0.300]	5.08 [0.200]	2.10 [0.083]	390261-1
8	10.16 [0.400]	7.62 [0.300]	4.76 [0.187]	390261-2
14	17.78 [0.700]	15.24 [0.600]	12.38 [0.487]	390261-3
16	20.32 [0.800]	17.78 [0.700]	14.92 [0.587]	390261-4
18	22.86 [0.900]	20.32 [0.800]	17.46 [0.687]	390261-5
20	25.40 [1.000]	22.86 [0.900]	20.00 [0.787]	390261-6
22	27.94 [1.100]	25.40 [1.000]	22.54 [0.887]	390261-7
24	30.48 [1.200]	27.94 [1.100]	25.10 [0.988]	390261-8
28	35.56 [1.400]	33.02 [1.300]	30.12 [1.185]	390261-9
32	40.64 [1.600]	38.10 [1.500]	35.20 [1.386]	1-390261-0

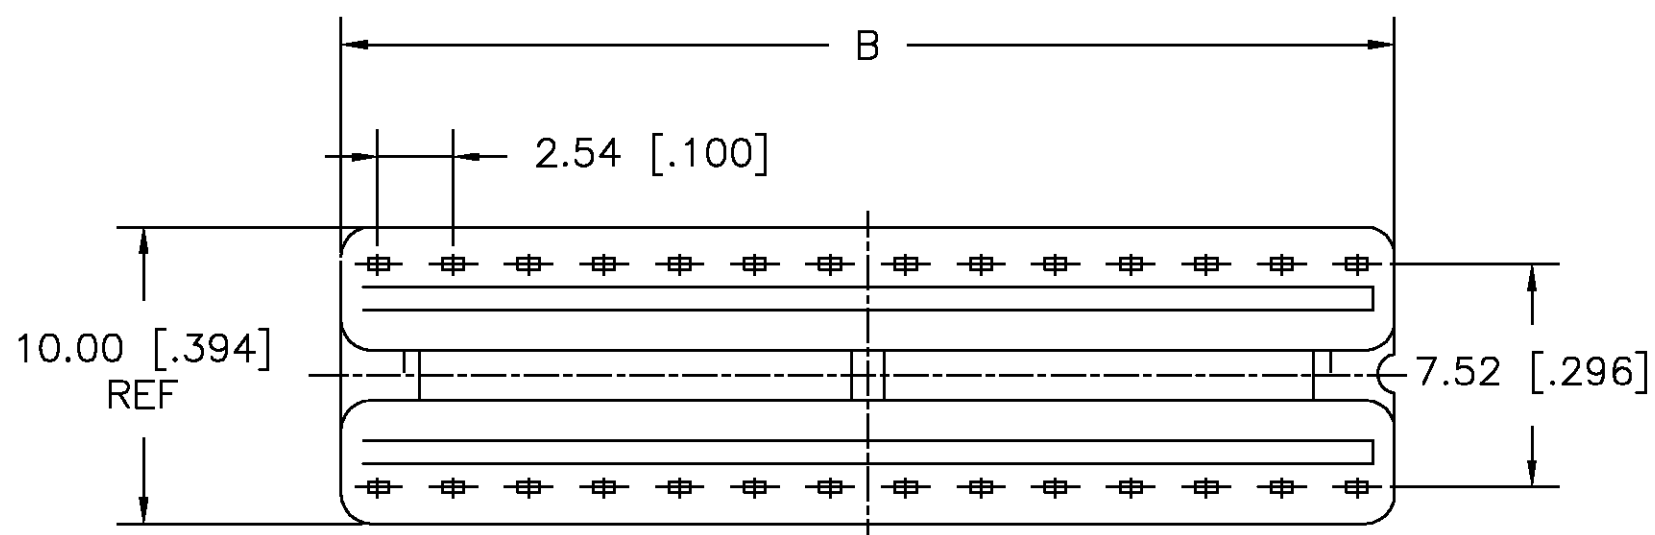

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. BURWELL 22MAR00

CHK S. RIDGILL 5-6-99

AMP Incorporated
Harrisburg Pa 17105-3608DIMENSIONS:
INCHESTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± 0.2 [0.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

1

2

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIP SOCKET, .300 CENTER LINE
LADDER STYLE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C-390261

1-390261-0

SCALE

4:1

SHEET

1 OF 1

REV

C