


ADSL LINE TRANSFORMERS

For Texas Instruments' CPE Chipsets



- Matched to Texas Instruments' AP5, AR5 and AU5 chipsets
- Excellent THD performance in a small footprint
- Designed to meet UL1950 and EN60950 supplementary insulation requirements for working voltages up to 250 Vrms

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Mounting	Turns Ratio (1-4):(10-7) (± 2%)	DC Resistance (Ω)		Leakage Inductance @ 100 kHz, 0.1 Vrms MAX (1-4) with (7-10) shorted	Inductance @ 100 kHz, 1 V (1-4)
			(1-4)	(10-7)		
BX2361	THT	2:1	≤ 2.00	≤ 0.55	15 μH	1.5 mH ±5%
BX2382 ¹	SMT	2:1	≤ 2.00	≤ 0.55	15 μH	1.5 mH ±5%


Additional Specifications

Part Number	THD (@ 100 kHz, 5.3 Vrms)	Load Resistance (Ω)	Isolation Voltage (Vrms)	Longitudinal Balance (from 30 kHz to 1.1 MHz)
BX2361	≤ -80 dB	100	1500	≤ -60 dB
BX2382 ¹	≤ -80 dB	100	1500	≤ -60 dB

¹ Transformers are shipped in trays, unless Tape & Reel packaging is specified by adding the suffix "T" to this part number (BX2382T).


Mechanicals

BX2361

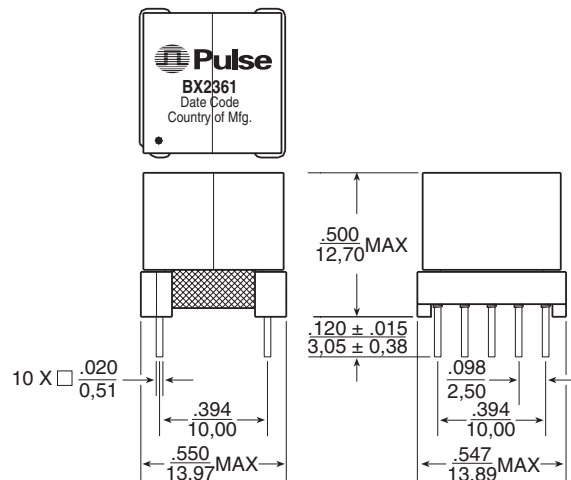

Weight 6.2 grams
Tray65/tray

BX2382

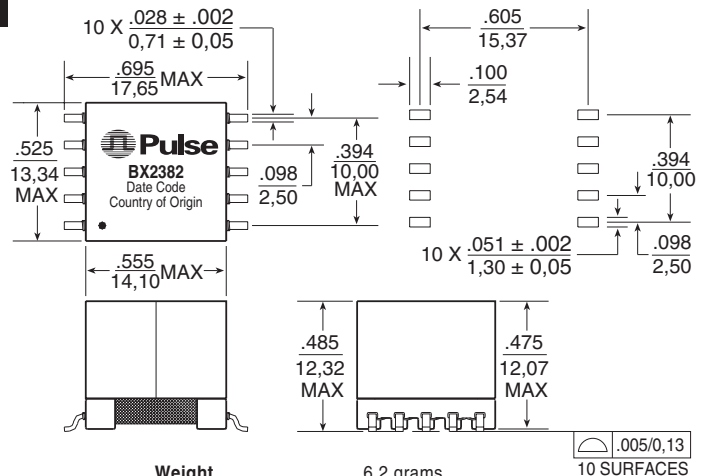

Weight 6.2 grams
Tray60/tray

Schematic



Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{.25}$

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.